

# SECTION 7

---

## EXPLODED VIEWS & REPLACEMENT PARTS LIST

Model No. : **AG-HMC150P, AG-HMC151E, AG-HMC152EN  
AG-HMC153MC**

---


Note:


1. \*Be sure to make your orders of replacement parts according to this list.
2. Unless otherwise specified, all resistors are in OHMS, K=1,000 OHMS, all capacitors are in MICROFARADS ( $\mu$ F), P= $\mu$ F.
3. The P.C. Board unit marked with "■" shown below the main assembled parts.
4. The parts marked with Ⓔ on the exploded view show the electric parts.
5. IMPORTANT SAFETY NOTICE  
Components identified with the mark ⚠ have the special characteristics for safety. When replacing any of these components, use only the same type.
6. The marking (RTL) indicates the retention time is limited for this item.  
After the discontinuation of this assembly in production, it will no longer be available.
7. "M" in Remark column indicates needed in the periodical maintenance.

## CONTENTS

MAIN FRAME PARTS ASSEMBLY .....	MPL-1
EVF PARTS ASSEMBLY .....	MPL-3
SIDE CASE PARTS ASSEMBLY .....	MPL-5
REAR JACK & BACK CASE PARTS ASSEMBLY.....	MPL-7
GRIP CASE PARTS ASSEMBLY .....	MPL-9
LCD PARTS ASSEMBLY .....	MPL-11
PACKING PARTS ASSEMBLY .....	MPL-13
ELECTRICAL REPLACEMENT PARTS LIST .....	EPL-1

# MAIN FRAME PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

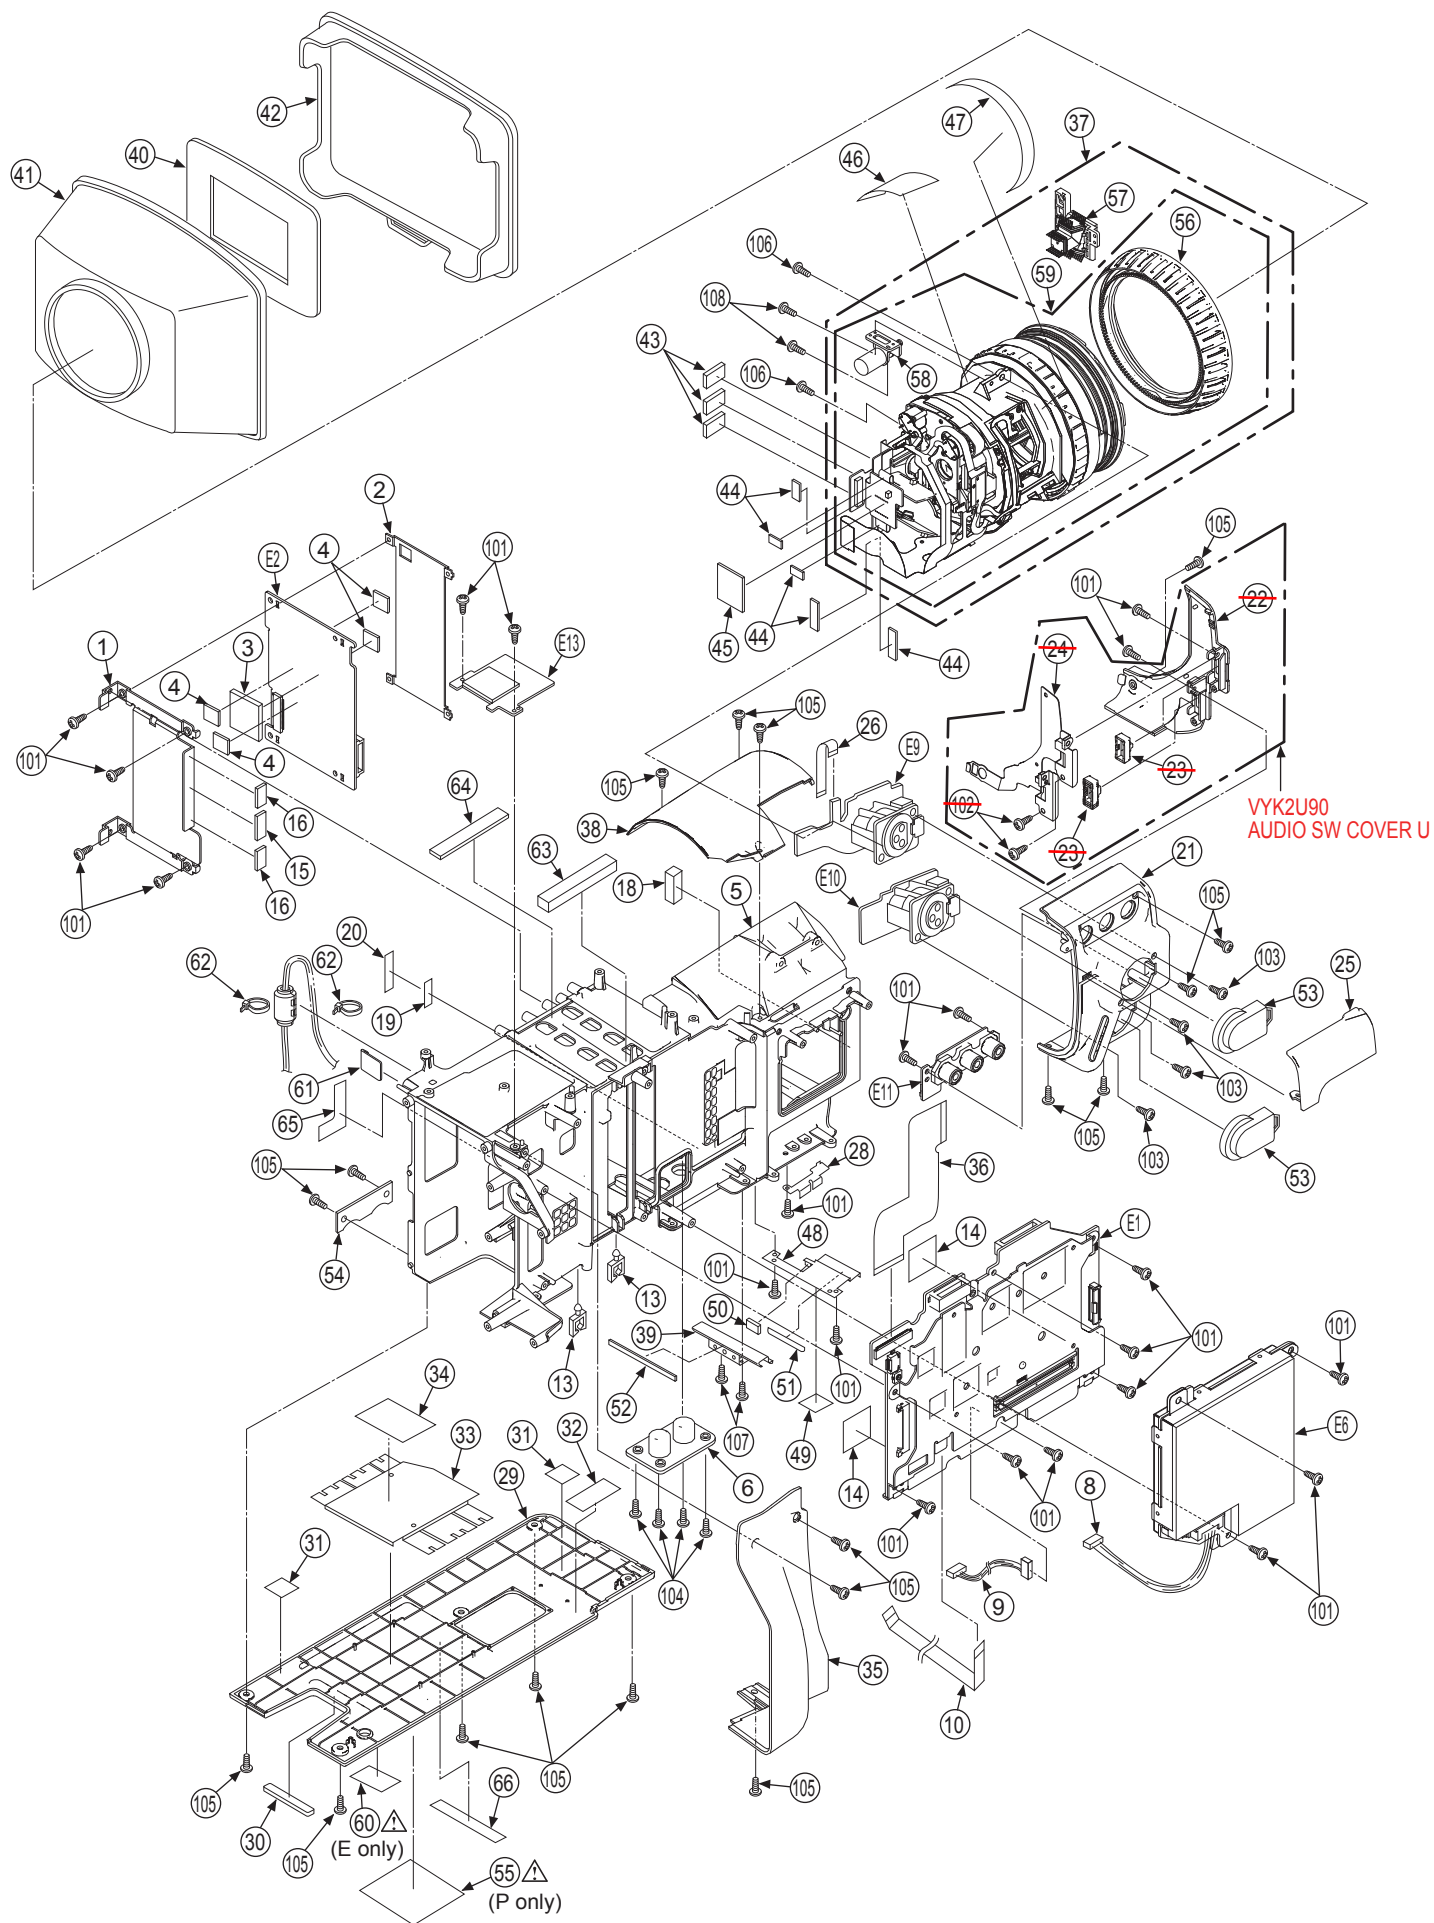


## MAIN FRAME PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	VSC6071	HEAT RADIATION PLATE	1	
2	VSC6074	HEAT RADIATION PLATE	1	
3	VG00C12	SHEET	1	
4	VG00C11	SHEET	4	
5	VKM7639	MAIN FRAME	1	
6	VMP8615	TRIPOD FRAME	1	
8	VEE1F52	BATTERY CABLE U	1	
9	VEE1E51	AUDIO CABLE U	1	
10	VWJ1667145L0	PRINTED FLEXIBLE CABLE	1	
13	VJF1273	CLAMPER	2	
14	VG00C10	SHEET	2	
15	VG00C13	SHEET	1	
16	VMT1949	GASKET	2	
18	VMT1846	GASKET	1	
19	VMZ3800	INSULATOR	1	
20	VSC6119	ALUMINUM TAPE (MAIN FRAME)	1	
21	VYK2W77	JACK FRAME U	1	
22	<del>VQ00A71</del>	AUDIO SW COVER	1	
23	<del>VQ00B54</del>	AUDIO SW KNOB	2	
24	<del>VMP9172</del>	AUDIO SW PLATE	1	
25	VJF1571	SIDE JACK CAP	1	
26	VWJ1067040L0	PRINTED FLEXIBLE CABLE	1	
28	VSC6105	EARTHING PLATE	1	
29	VG6243	BOTTOM COVER	1	
30	VKA0340	GLIP DUSTPROOF RUBBER	1	
31	VMT1947	GASKET	2	
32	VMT1851	GASKET	1	
33	VSC6110	BOTTOM SHIELD PLATE	1	
34	VMT1943	BOTTOM CUSHION	1	
35	VG6253	REAR SIDE COVER	1	
36	VWJ2066	TOP PRINTED FLEXIBLE CABLE	1	
37	VXW0961/SKIT	CAMERA LENS U	1	INCLUDING 43-47
38	VG6244	LENS COVER	1	
39	VSC6075	CCD HEAT RADIATION PLATE	1	
40	VGFI094	HOOD APERTURE PLATE	1	
41	VG00B03	HOOD	1	
42	VG00B04	HOOD CAP	1	
43	VSC5830	HEAT RADIATION SHEET	3	
44	JOZZZ0000053	GASKET	5	
45	JOZZZ0000074	GASKET	1	
46	VSC6120	SHIELD TAPE A	1	
47	VSC6121	SHIELD TAPE B	1	
48	VSC6106	CCD HOLD ANGLE	1	
49	VMT1937	CCD HOLD CUSHION	1	
50	VMT1955	LENS CUSHION	1	
51	VMZ3802	CCD BARRIER SHEET	1	
52	VMT1944	CCD HOLD CUSHION	1	
53	VJF1468	XLR CONNECTOR CAP	2	
54	VKW3399	AUDIO VR COVER	1	
△55	VQL1V30	CAUTION LABEL	1	FOR AG-HMC150P
56	VXQ1590	FOCUS RING	1	
57	VXQ1584/S	PRISM U	1	
58	L6DABBK00001	ZOOM MOTOR U	1	
59	VXW0962KIT	LENS U	1	INCLUDING 44, 46, 47
△60	VQL1V31	CE/WEEE LABEL	1	FOR AG-HMC151E
61	VG09553	AMP BASE	1	
62	VJF1559	CLAMPER	2	
63	VMT1861	GASKET	1	
64	VMT1945	GASKET	1	
65	VMZ3803	POWER BARRIER SHEET	1	
66	VQL1V32	DOLBY LABEL	1	
101	XQN2+B4FN	SCREW	22	
102	<del>XQN2+BJ4FJK</del>	SCREW	2	
103	XYN26+A6FJK	SCREW	4	
104	XQN2+B6FJK	SCREW	4	
105	XQN2+B4FJK	SCREW	18	
106	XYN3+J8FJ	SCREW	2	
107	XQN2+BJ5FJK	SCREW	2	
108	VHD1974	SCREW	2	

[illegible]


# EVF PARTS ASSEMBLY

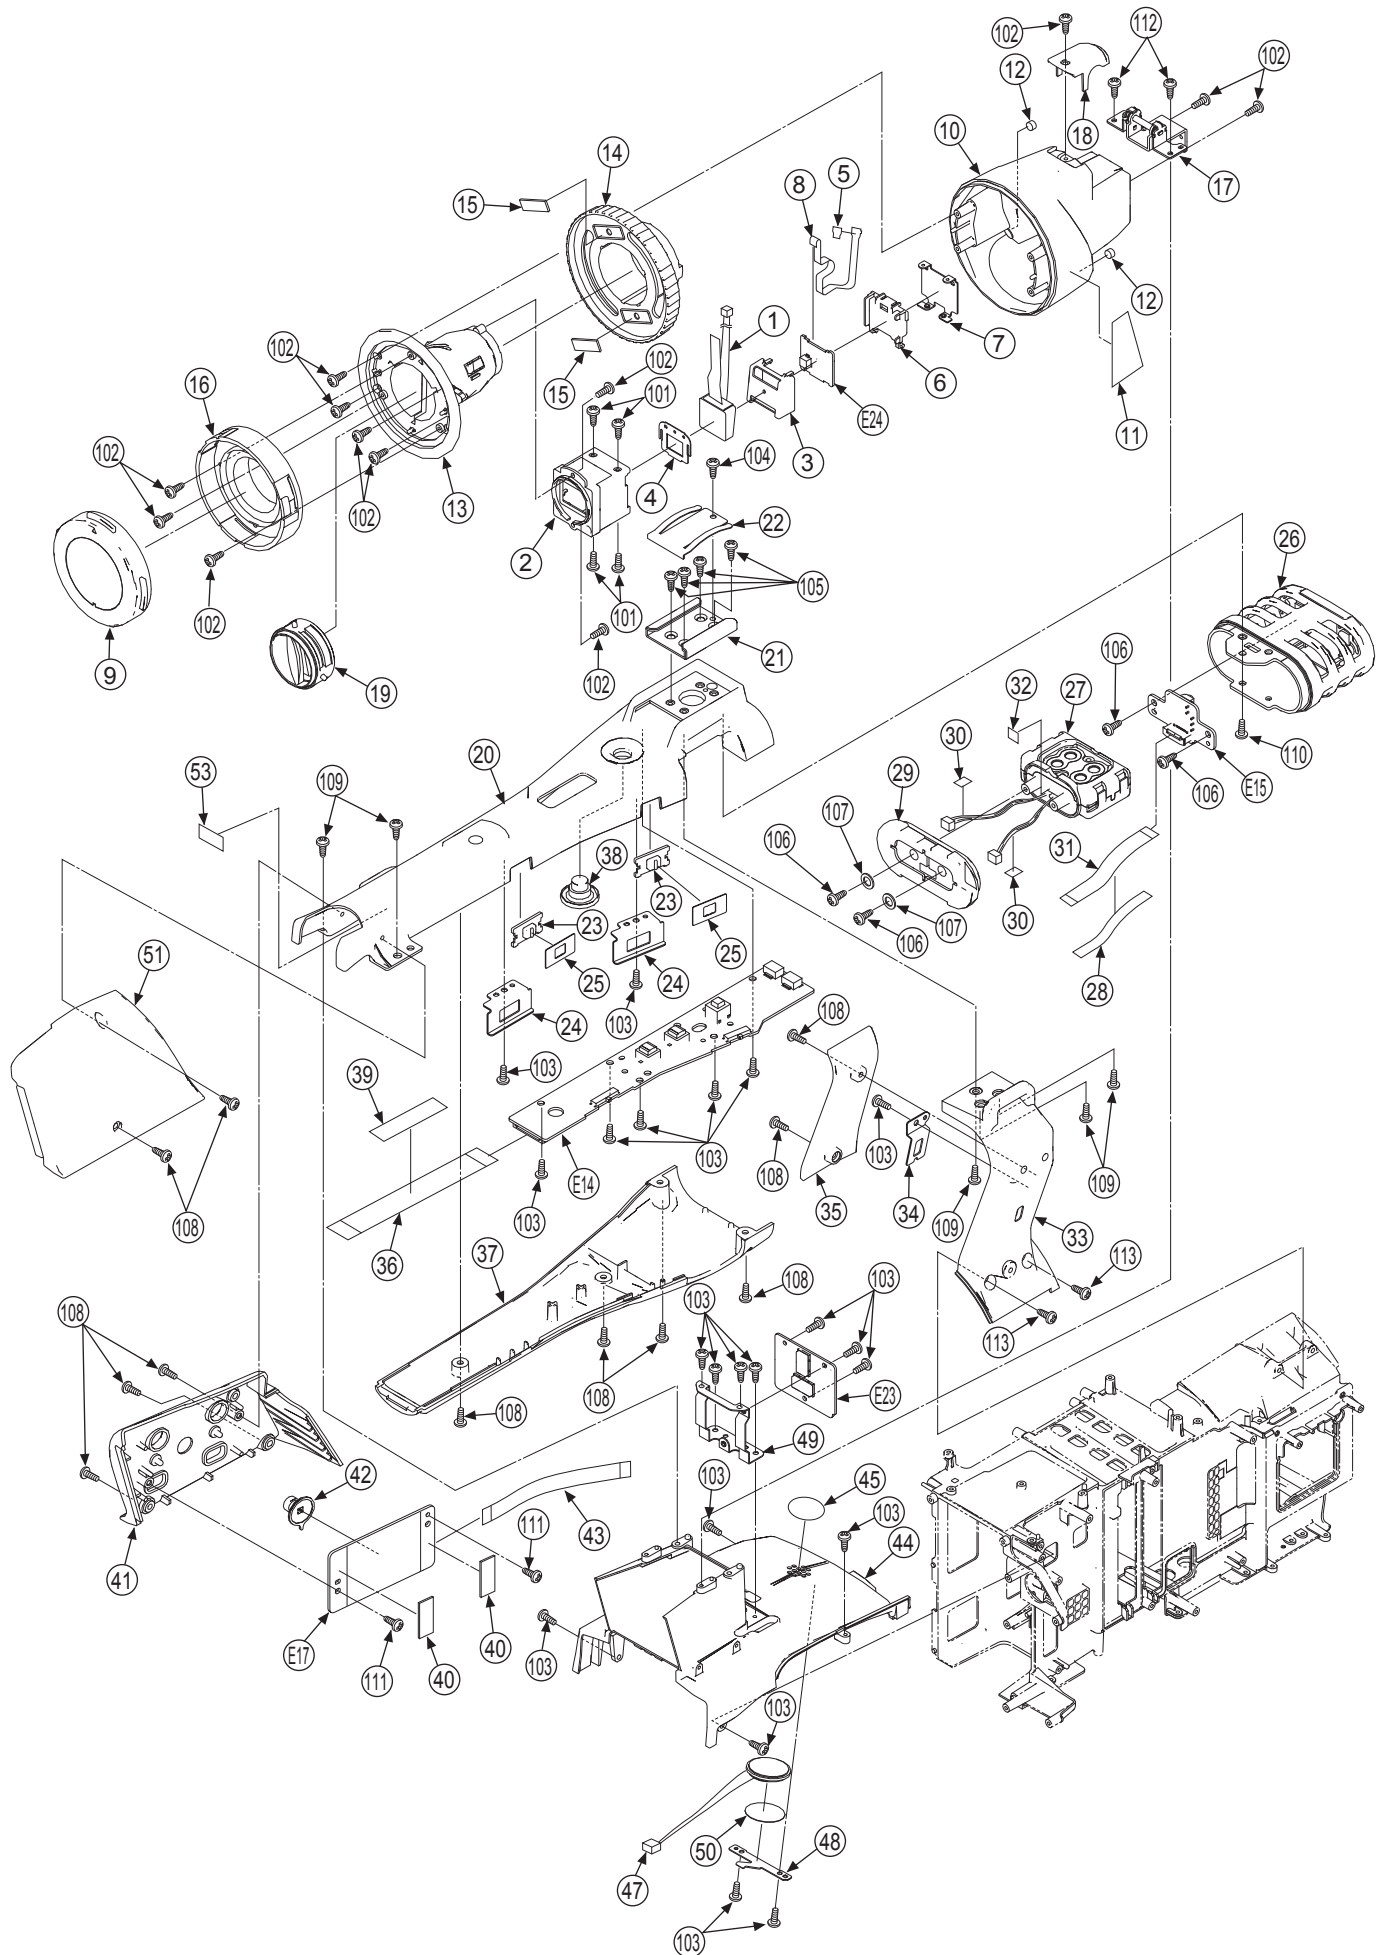

## EVF PARTS ASSEMBLY

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
1	L5EDDXM00003	ELECTRIC VIEW FINDER	1		E17	VEP001V9A	MENU P. C. BOARD	1	
2	VG00A84	LCD CASE	1		E23	VEP001W0A	TOP CON P. C. BOARD	1	
3	VMX3685	P. C. BOARD SPACER	1		E24	VEP001W4A	EVF CON P. C. BOARD	1	
4	VG07088	LCD MASK SHEET	1						
5	VMZ3799	EVF SHEET	1						
6	VG00A85	LCD CASE COVER	1						
7	VMP9179	LCD CASE ANGLE	1						
8	VWJ1805	PRINTED FLEXIBLE CABLE	1						
9	VYK1V99	EYE CAP U	1						
10	VG06251	EVF CASE	1						
11	VQL1U26	SUNLIGHT CAUTION LABEL	1						
12	VMG1286	CUSHION RUBBER	2						
13	VDK0187	HELICOID CAM TUBE	1						
14	VG00A82	ADJUST RING	1						
15	VMT1931	RING SPACER	2						
16	VG00A83	EYE CAP BASE	1						
17	VKC0621	EVF HINGE	1						
18	VG00A87	EVF HINGE COVER	1						
19	VXW0991	EVF LENS	1						
20	VKH0437	HANDLE	1						
21	VJF1421	SHOE	1						
22	VMC1697	SPRING	1						
23	VGUD027	SLIDE SWITCH KNOB	2						
24	VMP9170	SLIDE SW KNOB PLATE	2						
25	VGH4857	SLIDE KNOB SHEET	2						
26	VYK2U82	MIC CASE 1U	1						
27	VYK1R40	MIC U	1						
28	VMZ3775	ABSORPTION SHEET	1						
29	VMG1732	MIC DUMPER RUBBER	1						
30	VMZ3776	ABSORPTION SHEET	2						
31	VWJ10G6065L0	PRINTED FLEXIBLE CABLE	1						
32	VMT1767	MIC DUMPER SHEET	1						
33	VKH0439	HANDLE STAY	1						
34	VMP9171	PLATE	1						
35	VG00A66	HANDLE STAY COVER	1						
36	VWJ24G7060L0	PRINTED FLEXIBLE CABLE	1						
37	VG00A64	HANDLE GRIP	1						
38	VGU9988	REC BUTTON	1						
39	VMZ3474	LCD INSULATOR	1						
40	VMT1948	GASKET	2						
41	VYK2U99	VF CASE R 1 U	1						
42	VGUD041	MENU MODE KNOB	1						
43	VWJ10G7060L0	PRINTED FLEXIBLE CABLE	1						
44	VMZ2283	TOP CASE	1						
45	VMZ3712	SPEAKER NET	1						
47	LOAA02A00054	SPEAKER	1						
48	VMP9196	SPEAKER ANGLE	1						
49	VMP9233	TOP CON ANGLE	1						
50	VMG1286	CUSHION RUBBER	1						
51	VG06249	VF CASE L	1						
53	VMT1767	MIC DAMPER SHEET	1						
101	XQN16+C3FJ	SCREW	4						
102	XQN2+BJ5FJK	SCREW	13						
103	XQN2+B4FN	SCREW	21						
104	XSN2+4FC	SCREW	1						
105	XSS2+4FJK	SCREW	4						
106	XQN2+BJ4FJ	SCREW	4						
107	XWG2FJ	WASHER	2						
108	XQN2+B4FJK	SCREW	11						
109	XYN26+J6FJ	SCREW	5						
110	XYN2+F5FJ	SCREW	1						
111	XQN2+BJ5FN	SCREW	2						
112	XYN2+F6FJ	SCREW	2						
113	XYN26+J6FJK	SCREW	2						
E14	VEP04940A	HANDLE P. C. BOARD	1						
E15	VEP001X7A	REMOCON F P. C. BOARD	1						

## SIDE CASE PARTS ASSEMBLY

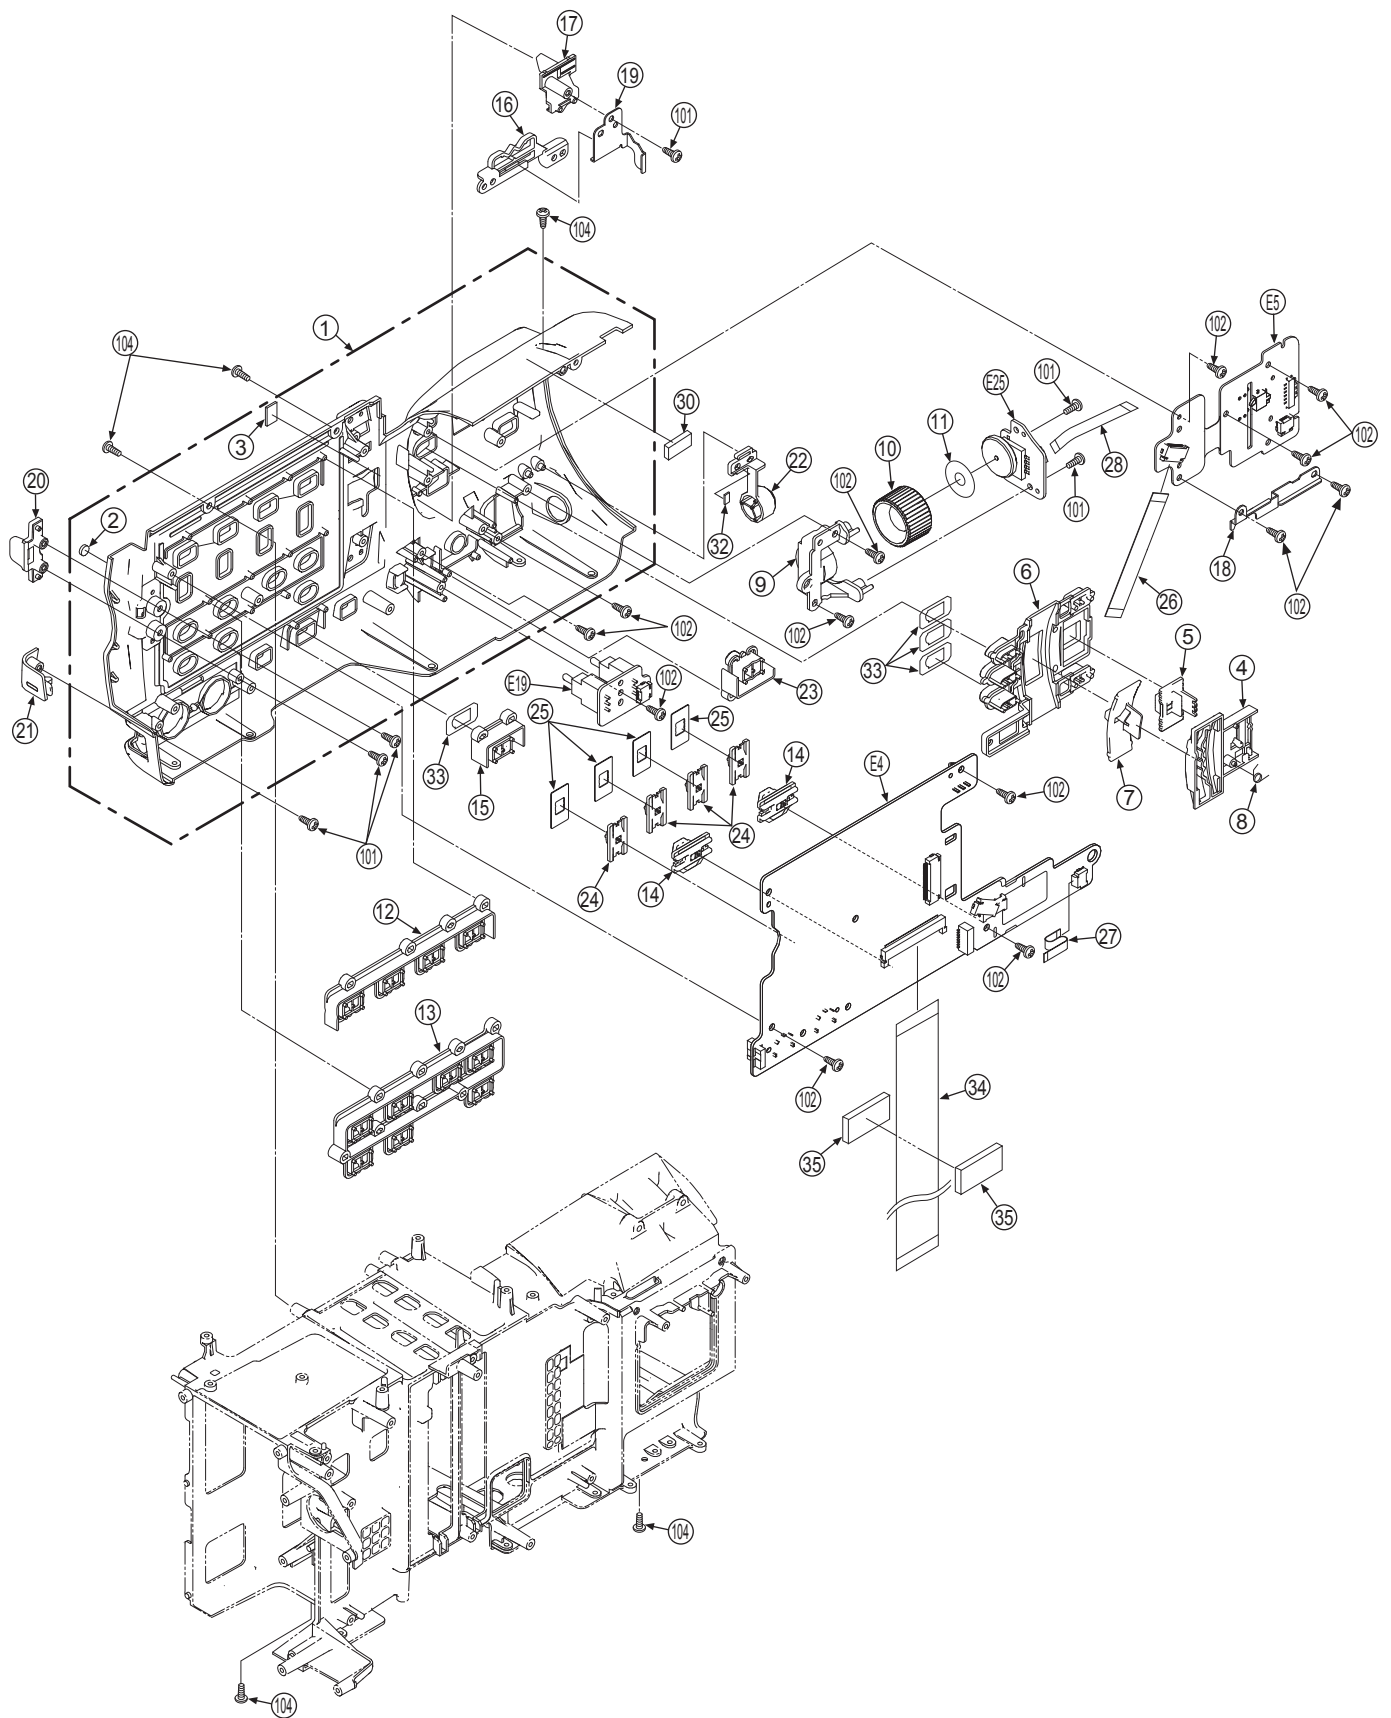


## SIDE CASE PARTS ASSEMBLY

[illegible]



# REAR JACK & BACK CASE PARTS ASSEMBLY

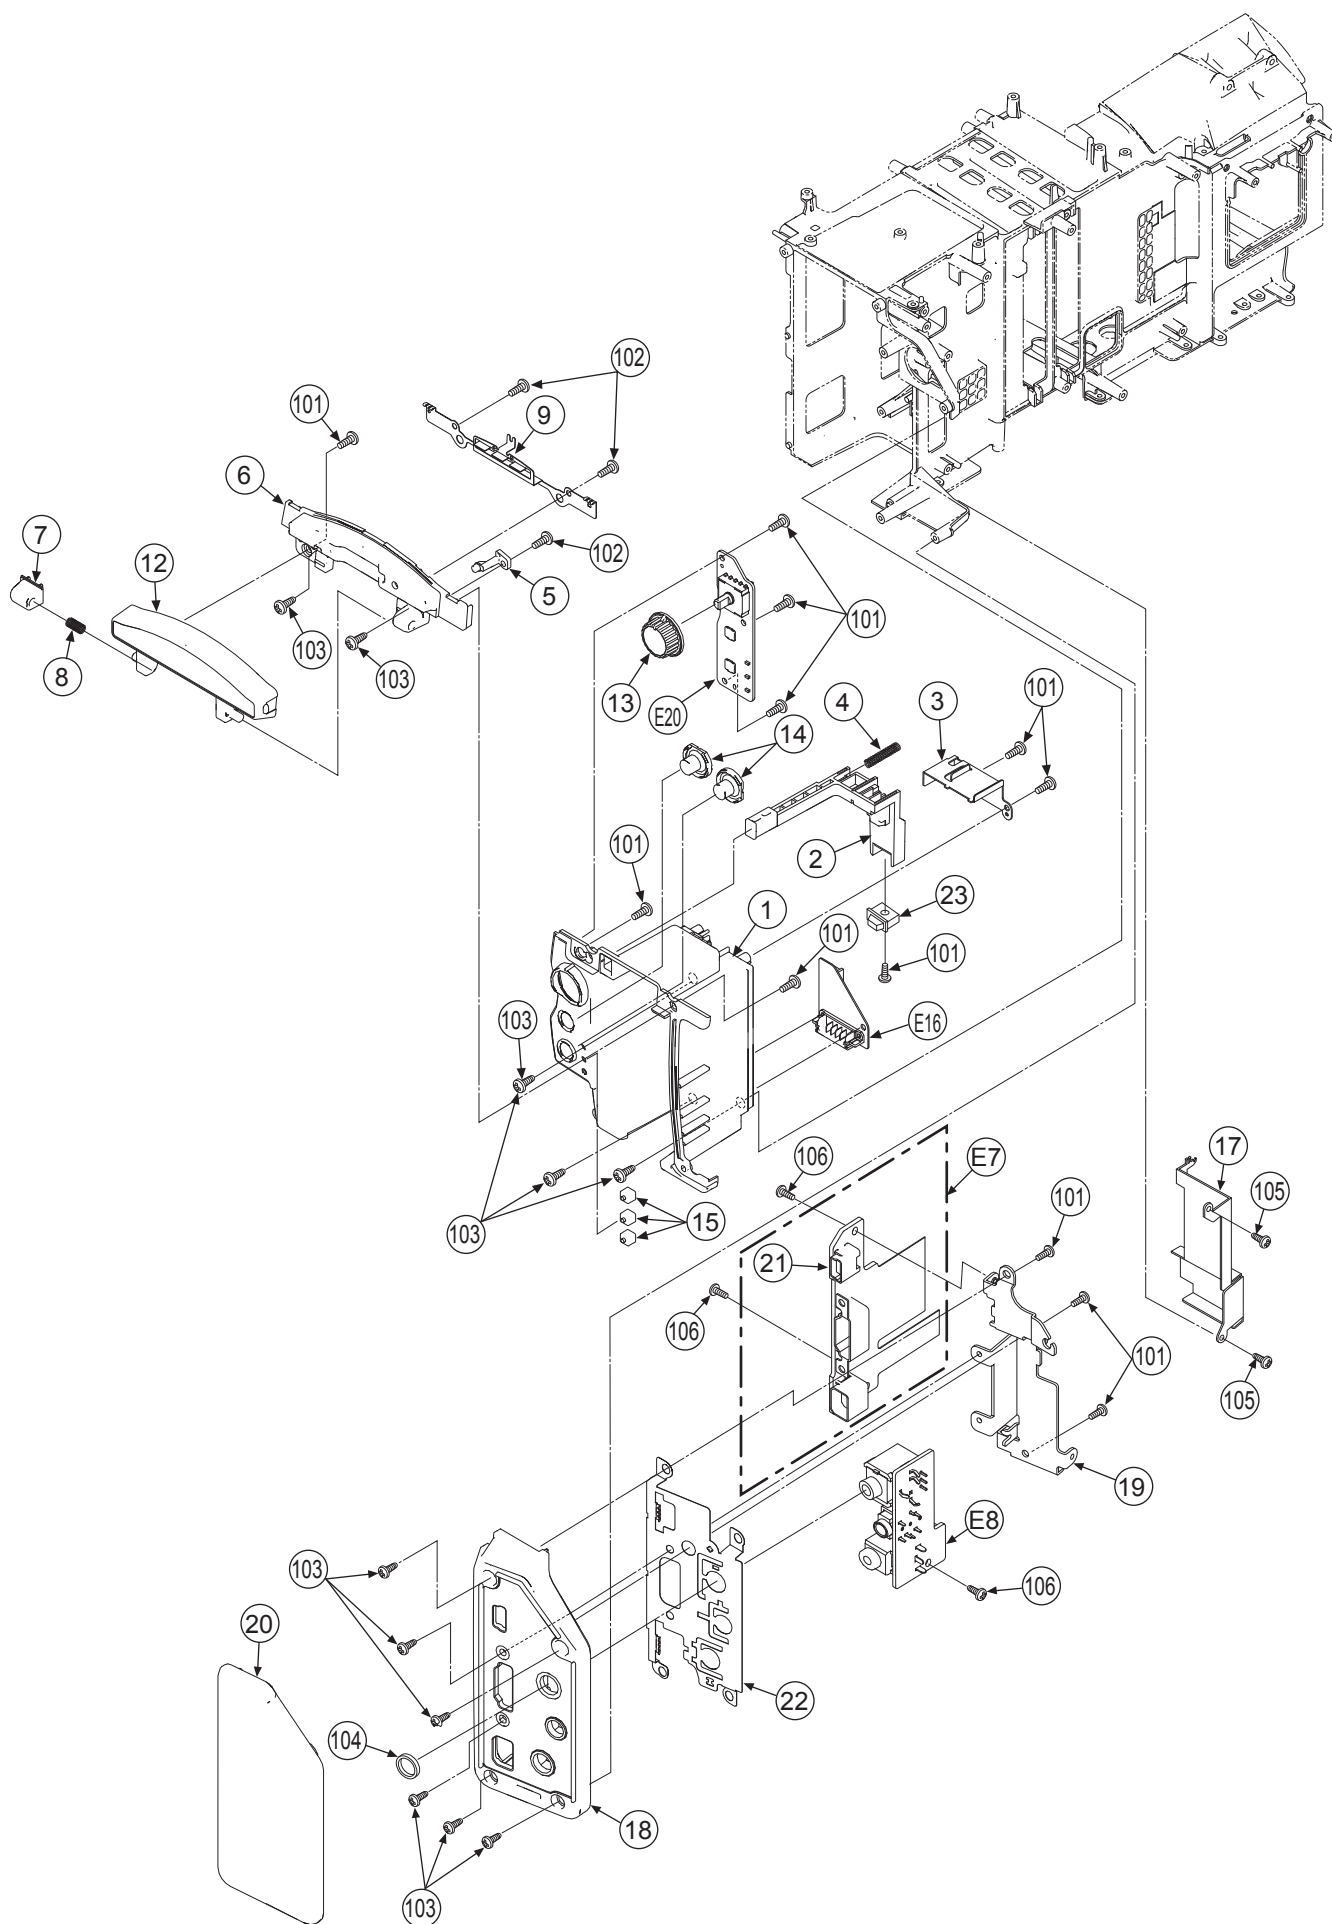




## REAR JACK & BACK CASE PARTS ASSEMBLY

[illegible]


# GRIP CASE PARTS ASSEMBLY

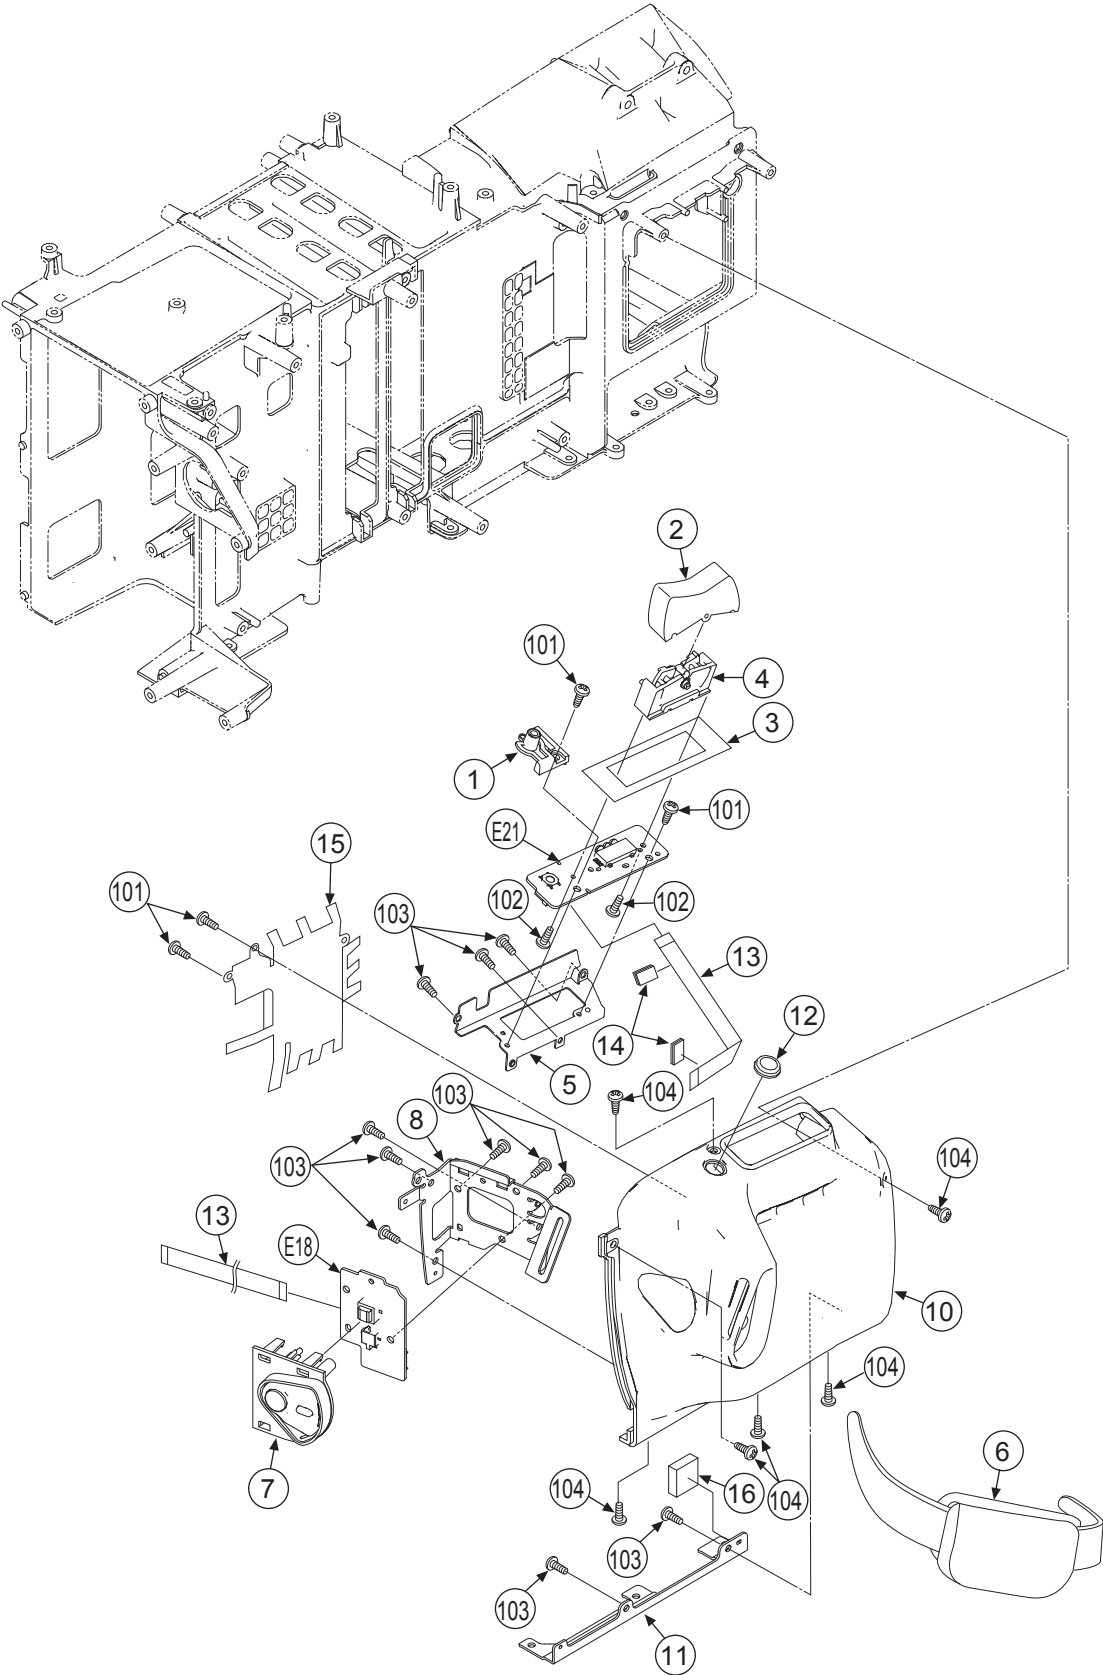

## GRIP CASE PARTS ASSEMBLY

[illegible]


# LCD PARTS ASSEMBLY

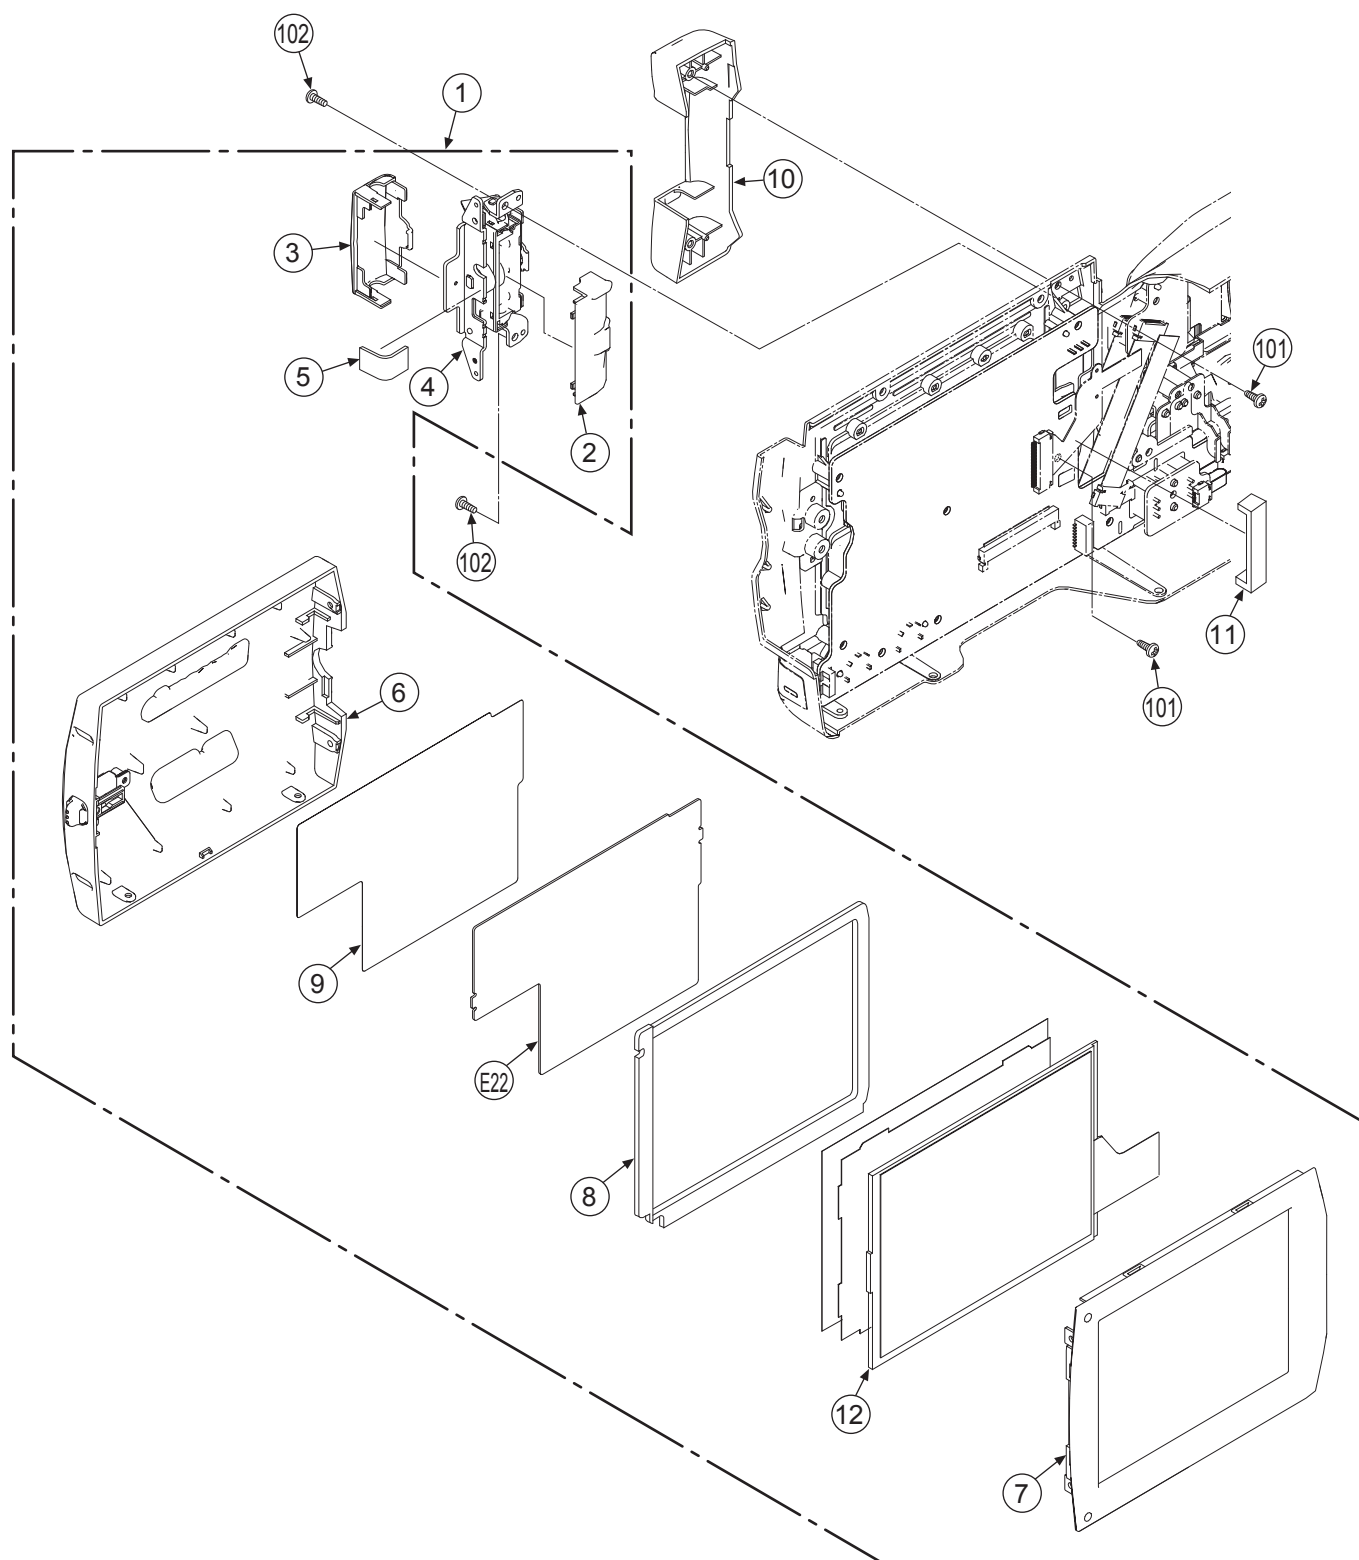


## LCD PARTS ASSEMBLY


[illegible]

# PACKING PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

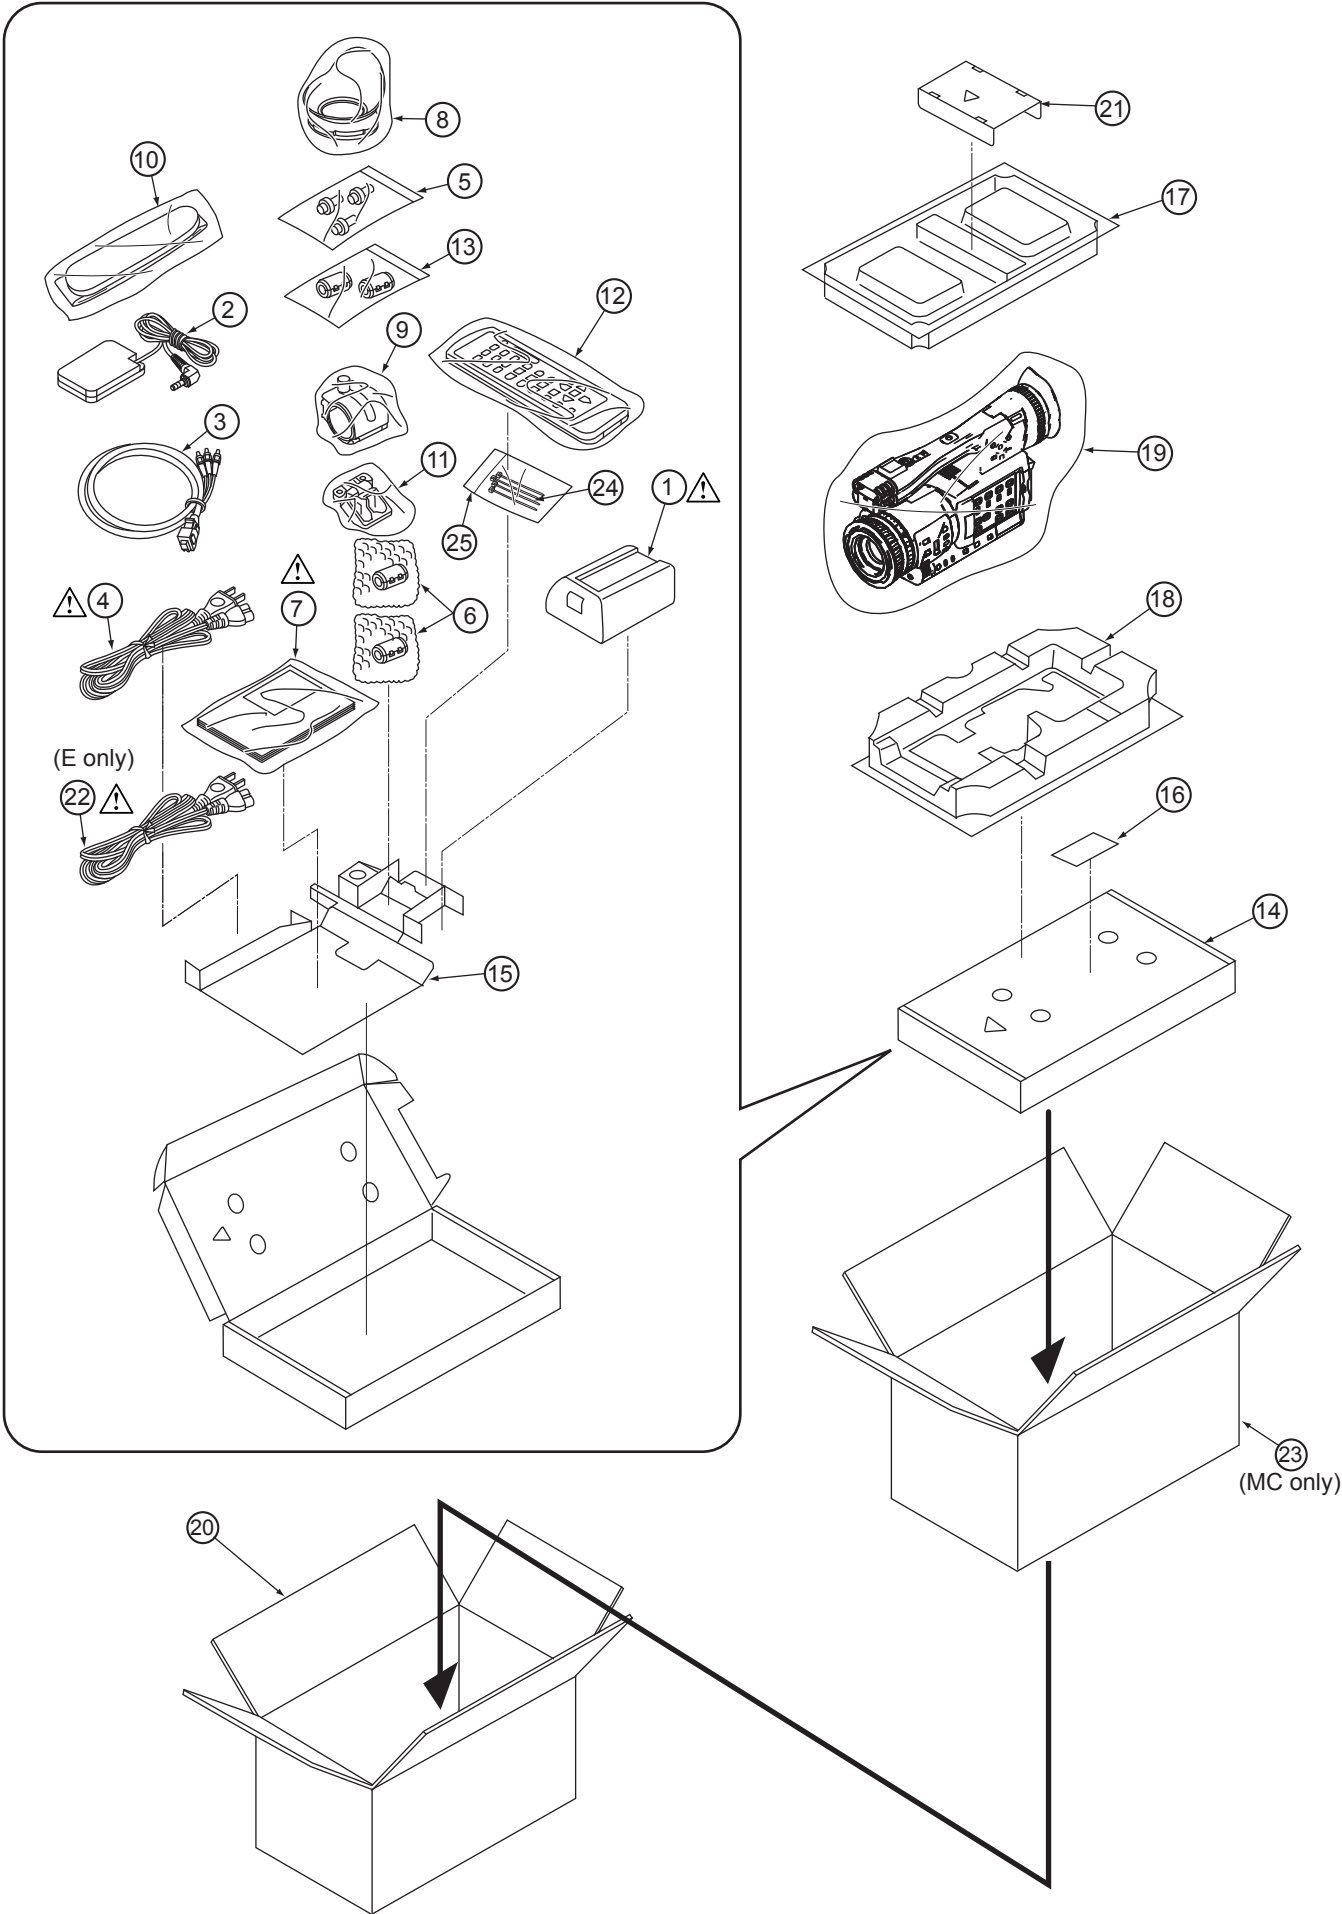

## PACKING PARTS ASSEMBLY

Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

[illegible][illegible]



## ELECTRICAL REPLACEMENT PARTS LIST

[illegible]

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
■ E1	VEB0865A	DIGITAL MAIN P. C. BOARD	1	(RTL) FOR AG-HMC150P/EN/MC
■ E1	VEP03H53A	DIGITAL MAIN P. C. BOARD	1	(RTL) FOR AG-HMC151E
C1-C3	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C5	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C6	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C8	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C9-11	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C12, 13	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	2	
C16	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C35	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C36	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1	
C101	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C102, 03	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C104	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C200, 01	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C202, 03	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2	
C206-13	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8	
C214, 15	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C216-19	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C220, 21	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C222	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C223, 24	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C225	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C226, 27	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C229-31	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C232, 33	ECJOEC1H090D	C. CAPACITOR CH 50V 9P	2	
C234	ECJ1VB0J225K	C. CAPACITOR CH6.3V 2.2U	1	
C236	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C239	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C240-43	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C246-49	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C252	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C256, 57	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C259-61	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C263	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C400	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C401	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C402	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C404	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C406	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C407-14	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8	
C416-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C420, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C430	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C431-38	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8	
C445-48	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C452-54	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3	
C455	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C457, 58	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C500	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C501-06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6	
C507	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C508-13	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6	
C516	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C519-23	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5	
C525	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C527	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C529, 30	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C532-34	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C537	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C541	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C543-45	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C547-49	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C551	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C553-55	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C557	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C559-61	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C563-65	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C567-69	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C571	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C573	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C575, 76	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C578	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C580	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C582	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C904	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C584, 85	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		C905	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C586	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C907	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C587	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C908	F1L1A4760003	C. CAPACITOR CH 16V 47U	1	
C588	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C909, 10	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C590-92	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C911	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C700	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C912	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C701	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C913	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1	
C702	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1		C915	F1L1A4760003	C. CAPACITOR CH 16V 47U	1	
C703	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1		C917, 18	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C704	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		C919, 20	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	2	
C705, 06	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		C921, 22	F3G1A476A019	T. CAPACITOR CH 10V 47U	2	
C707	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C923	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C708	ECJ1VC1H561J	C. CAPACITOR CH 50V 560P	1		C925	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C709	ECJ1VC1H821J	C. CAPACITOR CH 50V 820P	1		C927	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C710	ECJ1VC1H331J	C. CAPACITOR CH 50V 330P	1		C928	F3H1C476A049	T. CAPACITOR CH 16V 47U	1	
C711, 12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C932	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C713	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C934	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C714, 15	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C935, 36	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C716, 17	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C937	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	1	
C718	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C938	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C719	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C941-43	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	3	
C720	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C944	F3H1V106A031	T. CAPACITOR CH 35V 10U	1	
C721	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C945	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C722, 23	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C946, 47	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C725, 26	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C948, 49	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C727	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1		C950	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C728	ECJOEC1H680J	C. CAPACITOR CH 50V 68P	1		C951	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C729	ECJOEC1H560J	C. CAPACITOR CH 50V 56P	1		C952	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C730	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C953	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C731, 32	ECJ2FB1C225K	C. CAPACITOR CH 16V 2. 2U	2		C954	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C733	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C957	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C734-36	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C958	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C737, 38	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C961	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C739	F3F1A226A026	T. CAPACITOR CH 10V 22U	1		C962	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C740-42	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C963	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C745	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1000	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C746	F3H1A107A072	T. CAPACITOR CH 10V 100U	1		C1001, 02	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C747	ECJ2FB1A475K	C. CAPACITOR CH 10V 4. 7U	1		C1003	F3F1A226A026	T. CAPACITOR CH 10V 22U	1	
C748	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C1004	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C749	F3H1A107A072	T. CAPACITOR CH 10V 100U	1		C1005	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C750	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C1006	F3G1A476A019	T. CAPACITOR CH 10V 47U	1	
C751	ECJ2FB1A475K	C. CAPACITOR CH 10V 4. 7U	1		C1007	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C752, 53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C1008	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C754	F3H1A107A072	T. CAPACITOR CH 10V 100U	1		C1009	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C755, 56	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C1010	F3G1A476A019	T. CAPACITOR CH 10V 47U	1	
C757	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1011	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C758	ECJ2FB1A475K	C. CAPACITOR CH 10V 4. 7U	1		C1012	ECJOEC1H010C	C. CAPACITOR CH 50V 1P	1	
C759	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1014	F3F1A226A026	T. CAPACITOR CH 10V 22U	1	
C760	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1015-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
C761	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1019	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C762	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1020, 21	ECJOEC1H070D	C. CAPACITOR CH 50V 7P	2	
C764, 65	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C1022-30	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	9	
C766	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1032	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C767	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		C1034-38	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5	
C768, 69	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C1039	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C770, 71	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	2		C1040	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C772	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1041	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C773	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1042, 43	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C774	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1045	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C776	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1046	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C777	ECJOEF1A224Z	C. CAPACITOR CH 10V 0.22U	1		C1048	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C778	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1049	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C779	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1051	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C780	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1052, 53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C782, 83	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C1054, 55	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2	
C784	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	1		C1057	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C785	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1059	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C786	F3H1A107A072	T. CAPACITOR CH 10V 100U	1		C1060	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C787	ECJ2FB1A475K	C. CAPACITOR CH 10V 4. 7U	1		C1062	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C789	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1064	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C790-92	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C1065	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C793-95	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C1066	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1	
C796	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1067	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C901	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1201	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C902	ECUX1A474KBV	C. CAPACITOR CH 10V 0.1U	1		C1203	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C903	ECJ2FB1A475K	C. CAPACITOR CH 10V 4. 7U	1		C1204	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1206	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1808	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1209	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1809	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1211	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1812, 13	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1213	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1814	ECJUIC103JB5	P. CAPACITOR 16V 0.01U	1	
C1215	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C1817-19	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C1216	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1820	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1217, 18	ECJOEC1H080C	C. CAPACITOR CH 50V 8P	2		C1821, 22	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1220	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C1823	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1224	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1824	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1230, 31	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2						
C1232	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		CN1	K1KAC0AA0045	CONNECTOR (MALE)	1	
C1234, 35	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		CN2	K1KA50AA0240	CONNECTOR (MALE)	1	
C1237	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		CN3	K1KA70BA0028	CONNECTOR (FEMALE)	1	
C1240	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		CN4	K1KAC0AA0592	CONNECTOR (MALE)	1	
C1243	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		CN5	K1MN30BA0149	CONNECTOR	1	
C1246-48	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		CN6	K1KB30AA0006	CONNECTOR (FEMALE)	1	
C1255	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		CN102	K1MN50AA0018	CONNECTOR	1	
C1257	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		CN104	K1KB50BA0015	CONNECTOR (FEMALE)	1	
C1259	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		CN105	K1MN10BA0059	CONNECTOR	1	
C1261	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		CN106	K1MN30AA0018	CONNECTOR	1	
C1262	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		CN108	K1MN50BA0079	CONNECTOR	1	
C1268, 69	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		CN109	K1MN16BA0059	CONNECTOR	1	
C1275, 76	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		CN110	K1MN61BA0132	CONNECTOR	1	
C1281	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		CN901	K1KY08AA0710	CONNECTOR	1	
C1294	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1						
C1299	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		D1	D4ED1270A003	VARISTOR	1	
C1300	F1L1A4760003	C. CAPACITOR CH 16V 47U	1		D3	MA2SD2400L	D1ODE	1	
C1301, 02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		D4-D9	D4ED1270A003	VARISTOR	6	
C1304	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D10	D4ED1270A008	VARISTOR	1	
C1305, 06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		D700-05	MA3J14300L	D1ODE	6	
C1307	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D900	MA3J14300L	D1ODE	1	
C1308	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		D901-03	MA142WK	D1ODE	3	
C1309	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		D904, 05	MA3J142D0L	D1ODE	2	
C1310	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		D906	MA111	D1ODE	1	
C1312	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D1001	MA2SD2400L	D1ODE	1	
C1313	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		D1003	MA3J14700L	D1ODE	1	
C1400	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D1005	MA2SD2400L	D1ODE	1	
C1401	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		D1006	MA3J14700L	D1ODE	1	
C1403, 04	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		D1008, 09	MA3J14700L	D1ODE	2	
C1405	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		D1600-11	EZJZ0V80010	D1ODE	12	
C1406	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D1612, 13	MA2J72800L	D1ODE	2	
C1407, 08	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	2		D1614	MA2SD2400L	D1ODE	1	
C1409, 10	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		D1700	MA3J14700L	D1ODE	1	
C1501	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1						
C1502	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		FL100	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	1	
C1503	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		FL401-03	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	3	
C1601	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		FL500-02	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	3	
C1602	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		FL1200-04	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	5	
C1606	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		FL1600, 01	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	2	
C1607	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		FL1603	F1HOJ1050022	C. CAPACITOR CH6. 3V 1U	1	
C1609	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1						
C1611	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1	COEBA0000039	IC	1	
C1617	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC2	COEBD0000224	IC	1	
C1618	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		IC3	COEBE0000348	IC	1	
C1624	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		IC11	COJBAZ002192	IC	1	
C1625, 26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC12	COEBC0000156	IC	1	
C1628-32	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	5		IC100	COBCBCDC00073	IC	1	
C1638	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC209	COJBAB000660	IC	1	
C1700-02	ECJ1VB0J225K	C. CAPACITOR CH6. 3V 2. 2U	3		IC213-15	COJBAA000362	IC	3	
C1704, 05	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC400	C1AB00002486	IC	1	
C1709	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC401	COJBAB000660	IC	1	
C1711	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC402	COBCBAC00072	IC	1	
C1714	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC500	C1ZBZ0003923	IC	1	
C1716-18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC501	COBCBAC00061	IC	1	
C1720, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC502, 03	COJBAAZ002906	IC	2	
C1722	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC504	COJBAAZ002192	IC	1	
C1723-25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		IC700	COBCBCDC00008	IC	1	
C1726	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC701	C1AB00000351	IC	1	
C1727	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC703	C1AB00002891	IC	1	
C1734	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC704	C1AB00002890	IC	1	
C1735	F1L1A4760003	C. CAPACITOR CH 16V 47U	1		IC705	COABBB000196	IC	1	
C1736, 37	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC706	COBBBA000024	IC	1	
C1738, 39	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		IC707	COABBB000196	IC	1	
C1741	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC708	COJBAAZ002328	IC	1	
C1800	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC710	COBCBAC000064	IC	1	
C1801	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		IC711	COBZEB000001	IC	1	
C1806	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC712	COJBAA000432	IC	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
IC900	COFBBY000043	IC	1		Q906-10	UNR9113JOL	TRANSISTOR	5	
IC901	C1AB00002729	IC	1		Q911	UNR9213JOL	TRANSISTOR	1	
IC902, 03	COJBAA000602	IC	2		Q912	UNR9113JOL	TRANSISTOR	1	
IC905	COABAB000121	IC	1		Q913, 14	2SB1219AOL	TRANSISTOR	2	
IC907	COABAB000121	IC	1		Q915-18	2SD197900L	TRANSISTOR	4	
IC908	AN77L09M	IC	1		Q919	B1MBRFA00001	TRANSISTOR	1	
IC909	COBCBC000053	IC	1		Q1000	2SB0970XOL	TRANSISTOR	1	
IC1005-08	COJBAA000362	IC	4		Q1001	UNR211500L	TRANSISTOR	1	
IC1009	C1ZBZ0002602	IC	1		Q1002, 03	XP0411500L	TRANSISTOR	2	
IC1010	COEBE0000240	IC	1		Q1006	UNR9214JOL	TRANSISTOR	1	
IC1011	COEBK0000066	IC	1		Q1007	UNR9213JOL	TRANSISTOR	1	
IC1012	C1ZBZ0003542	IC	1		Q1200	B1MBRFA00001	TRANSISTOR	1	
IC1013	C3EBG6000016	IC	1		Q1600	B1MBRFA00001	TRANSISTOR	1	
IC1200	MN2PS0001SP1	IC	1		Q1700	XP0431N00L	TRANSISTOR	1	
IC1201	COJBAA002906	IC	1		Q1701	2SD2216JOL	TRANSISTOR	1	
IC1202	COBCBD000041	IC	1		Q1702	B1ADGD000005	TRANSISTOR	1	
IC1203	COBCAD000039	IC	1		Q1703	UNR9213JOL	TRANSISTOR	1	
IC1204	COEBC0000090	IC	1		Q1704	2SB1462JOL	TRANSISTOR	1	
IC1400, 01	C3ABSJ000006	IC	2		Q1705, 06	XP0431N00L	TRANSISTOR	2	
IC1600	C1AB00002892	IC	1						
IC1701	COBCBC000053	IC	1		R8, R9	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
IC1702	COCBAGE00012	IC	1		R32	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
IC1704	C1AB00002388	IC	1		R33-36	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	4	
IC1800, 01	COBCBC000053	IC	2		R37	EXB28V102J	COMBI. R-R	1K	1
IC1802	COJBAA000031	IC	1		R38-43	DOYAR0000007	M. RESISTOR CH 1/16W 0	6	
IC1803	COABHA000020	IC	1		R46-54	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	9	
IC1808	COJBAA002217	IC	1		R59	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
IC1809	COJBAA000851	IC	1		R60	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1	
IC1810	COJBAA000031	IC	1		R61, 62	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
					R95	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
IP200, 01	C3EBJG000001	IC	2		R99	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
IP1500	VEF0085	IC	1		R104	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
IP202	MN103SD00SA	IC	1		R105	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
L1, L2	JOJDC0000102	FILTER	2		R118	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L200	JOJHC0000032	FILTER	1		R200-02	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
L201-03	JOJDC0000102	FILTER	3		R203-05	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	3	
L400, 01	JOJHC0000032	FILTER	2		R206-08	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	3	
L403	JOJHC0000032	FILTER	1		R209	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L404-06	JOJDC0000102	FILTER	3		R210	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
L500-07	JOJDC0000102	FILTER	8		R211-13	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
L508-10	JOJHC0000032	FILTER	3		R214, 15	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L511, 12	JOJDC0000102	FILTER	2		R216	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L700-06	G1C100KA0115	COIL 10UH	7		R217, 18	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L707, 08	G1C220JA0041	COIL 22UH	2		R219	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L709	G1C6R8JA0041	COIL 6.8UH	1		R220, 21	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L710-13	G1C100KA0115	COIL 10UH	4		R222	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L900	JOJHC0000032	FILTER	1		R223, 24	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L902	JOJHC0000032	FILTER	1		R225	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L903, 04	JOJDC0000102	FILTER	2		R226, 27	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
L905	G1C100KA0115	COIL 10UH	1		R228, 29	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	2	
L1000-07	JOJDC0000102	FILTER	8		R235	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L1200	JOJDC0000102	FILTER	1		R237	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1	
L1201	JOJHC0000032	FILTER	1		R238	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L1202-05	JOJDC0000102	FILTER	4		R240, 41	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L1206	G1C100KA0115	COIL 10UH	1		R251, 52	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
L1207	JOJDC0000102	FILTER	1		R253	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
L1208	JOJHC0000032	FILTER	1		R260	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
L1500	JOJDC0000102	FILTER	1		R270-72	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
L1600	G1C4R7MA0073	COIL 4.7UH	1		R273, 74	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	2	
L1601	G1C100KA0115	COIL 10UH	1		R275-77	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
L1606	G1C100KA0115	COIL 10UH	1		R278	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
L1607-10	JOJBC0000012	FILTER	4		R283, 84	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
L1612-15	JOJAB0000220	FILTER	4		R285, 86	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
L1701, 02	JOJDC0000102	FILTER	2		R287	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	1	
L1705-07	JOJDC0000102	FILTER	3		R288, 89	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
L1800	JOJCC00000405	FERRITE CORE	1		R290	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
L1802	JOJDC0000102	FILTER	1		R291, 92	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
L1806-08	JOJDC0000102	FILTER	3		R293, 94	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
					R298	EXB28V103J	COMBI. R-R	10K	1
PC700	K6G1AKB00035	IC	1		R299	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
					R300, 01	EXB28V102J	COMBI. R-R	1K	2
Q200-02	XN0460100L	TRANSISTOR-RESISTOR	3		R302	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
Q204	UNR9211JOL	TRANSISTOR	1		R303	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q700, 01	2SB1218ARL	TRANSISTOR	2		R304	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
Q710	UNR9214JOL	TRANSISTOR	1		R305	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
Q712	UNR9213JOL	TRANSISTOR	1		R306-08	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
Q900-05	UNR9213JOL	TRANSISTOR	6		R309, 10	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R311	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R742	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R314, 15	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R743	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R316, 17	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R744-46	ERJ3RED750	M. RESISTOR CH 1/16W 75	3	
R319	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R747, 48	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
R320	EXB28V102J	COMBI. R-R	1K		R749	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R321, 22	EXB28V473J	COMBI. R-R	47K		R750	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R403	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R751	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R406, 07	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2		R752	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R408	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R753	ERJ3RED750	M. RESISTOR CH 1/16W 75	1	
R409-11	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	3		R754	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R412-14	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R755, 56	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	2	
R416	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R757	ERJ2RKD824	M. RESISTOR CH 1/10W 820K	1	
R421	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R758	ERJ2RHD912	M. RESISTOR CH 1/16W 9.1K	1	
R422, 23	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R759	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R424	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R760	ERJ2RKD470	M. RESISTOR CH 1/10W 47	1	
R425	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R761, 62	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	2	
R429, 30	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R763-65	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3	
R435	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R766	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R436	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R769	ERJ2RHD301	M. RESISTOR CH 1/16W 300	1	
R458, 59	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R770, 71	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
R460	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R772, 73	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	2	
R461-64	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	4		R774	ERJ2GEJ561	M. RESISTOR CH 1/16W 560	1	
R465-70	EXB28V330J	COMBI. R-R	33		R777	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R500, 01	EXBN8V101J	COMBI. R-R	100		R781	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R502-05	EXB28V220J	COMBI. R-R	22		R788, 89	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R519	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R790	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1	
R520	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R793	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R522	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R797	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R523, 24	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R798	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R525	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R903	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R528	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R904	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R531	ERJ2GEJ680	M. RESISTOR CH 1/16W 68	1		R905-08	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	4	
R536	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R909	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R545-52	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	8		R910	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R553, 54	EXB28V220J	COMBI. R-R	22		R911	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R555	EXB28V103J	COMBI. R-R	10K		R912	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R556	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R913-20	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	8	
R557	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R922, 23	ERJ3GEYJ561	M. RESISTOR CH 1/16W 560	2	
R558-65	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	8		R925-28	ERJ6GEYG680	M. RESISTOR CH 1/10W 68	4	
R567	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R929	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R570	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R930, 31	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2	
R572-74	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R932	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R575	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R933	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R577	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R934-36	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3	
R578	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R938	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R579, 80	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		R940	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R581-83	DOYAR0000007	M. RESISTOR CH 1/16W 0	3		R942	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R620, 21	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R945, 46	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R700-02	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	3		R951, 52	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R703	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R953-56	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	4	
R705	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R959, 60	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	2	
R706	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R963, 64	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	2	
R708	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R970-73	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	4	
R709	ERJ2RKD334	M. RESISTOR CH 1/10W 330K	1		R977	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R710	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1		R978	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R711	ERJ2RHD332	M. RESISTOR CH 1/16W 3.3K	1		R984, 85	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R712	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R986	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R713	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1001	ERJ2GEJ561	M. RESISTOR CH 1/16W 560	1	
R714	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1		R1003	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R715	ERJ2RHD123	M. RESISTOR CH 1/16W 12K	1		R1004	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R716	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1006-11	DOYAR0000007	M. RESISTOR CH 1/16W 0	6	
R717	ERJ2RHD621	M. RESISTOR CH 1/16W 620	1		R1012	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R718	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1014	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R719	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1015	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R720	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1		R1016	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R721	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1017	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R722, 23	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2		R1021	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R724	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1022	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R725, 26	ERJ2RHD301	M. RESISTOR CH 1/16W 300	2		R1023	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1	
R727	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1024	EXB28V472J	COMBI. R-R	4.7K	
R729	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R1025	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R731-34	DOYAR0000007	M. RESISTOR CH 1/16W 0	4		R1027	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R735	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1028	ERJ2GEJ393	M. RESISTOR CH 1/16W 39K	1	
R736	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1029	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R737	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1032	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R739	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R1033	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R740, 41	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R1034	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1035, 36	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1269-71	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R1038	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1272	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1039	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1273-75	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R1041-43	EXB28V103J	COMBI. R-R 10K	3		R1277	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1044	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1278	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R1045	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1279	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1046	EXB28V473J	COMBI. R-R 47K	1		R1297	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1047, 48	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2		R1298	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1049, 50	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1299	ERJ2GEJ393	M. RESISTOR CH 1/16W 39K	1	
R1052	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1303	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1053	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R1305	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1054	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1308	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1055	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1309	EXB28V103J	COMBI. R-R 10K	1	
R1056	EXB28V473J	COMBI. R-R 47K	1		R1312-17	EXB28V103J	COMBI. R-R 10K	6	
R1057	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1319-22	EXB28V330J	COMBI. R-R 33	4	
R1058	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		R1323	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1059	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1		R1324, 25	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	2	
R1061-64	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	4		R1327	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1	
R1065	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1500	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1067	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1501	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1068	ERJ2GEJ152	M. RESISTOR CH 1/16W 1.5K	1		R1502-05	EXB28V470J	COMBI. R-R 47	4	
R1069	ERJ2RHD392	M. RESISTOR CH 1/16W 3.9K	1		R1600, 01	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R1070	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1603	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	1	
R1071	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1604	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1072	ERJ2GEJ152	M. RESISTOR CH 1/16W 1.5K	1		R1605	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1073	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1606	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1076	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1607	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1077	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R1608	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1078	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1		R1609, 10	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
R1079-82	EXB28V560J	COMBI. R-R 56	4		R1613	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1083	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1614	ERJ2RHD562	M. RESISTOR CH 1/16W 5.6K	1	
R1089	ERJ2GEJ822	M. RESISTOR CH 1/16W 8.2K	1		R1617, 18	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
R1092	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1619	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1094	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R1620	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1095	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1		R1701	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1097	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1		R1702	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1	
R1098, 99	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1704	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
R1100	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1705-07	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
R1101	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1708	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1103	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1710	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1105, 06	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2		R1718-20	DOYAR0000007	M. RESISTOR CH 1/16W 0	3	
R1108	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1		R1722	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1109, 10	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1723	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1111	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R1724	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1	
R1112, 13	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1725	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R1114	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	1		R1726	ERJ2GEJ182	M. RESISTOR CH 1/16W 1.8K	1	
R1115	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1727	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1	
R1116	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1729	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1117	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1800, 01	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
R1118	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1803	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1	
R1119, 20	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1808	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1122	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1809	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R1123, 24	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1810	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R1125	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1811	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R1129	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R1813	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R1134	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1819	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R1135	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1821	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1201	ERJ2RHD5901	M. RESISTOR CH 1/16W 5.9K	1		R1823	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
R1202	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1824	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
R1204	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		R1827	ERJ2GEJ151	M. RESISTOR CH 1/16W 150	1	
R1206, 07	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		R1829	ERJ2GEJ820	M. RESISTOR CH 1/16W 82	1	
R1210	ERJ2GEJ220	M. RESISTOR CH 1/16W 22	1		R1830	ERJ2GEJ470	M. RESISTOR CH 1/16W 47	1	
R1212	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1		R1834	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R1213	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R1835	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1214	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1		R1842	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1215, 16	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R1843	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1217	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		R2201	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1218	EXB28V220J	COMBI. R-R 22	1						
R1219	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1		X200	HOJ180500014	CRYSTAL OSCILLATOR	1	
R1220, 21	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2		X1000	HOJ327200115	CRYSTAL OSCILLATOR	1	
R1222	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1		X1001	HOJ135500031	CRYSTAL OSCILLATOR	1	
R1223	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		X1200	HOJ120500042	CRYSTAL OSCILLATOR	1	
R1224	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1		X1802	H1C2705B0020	CRYSTAL OSCILLATOR	1	
R1225	DOYAR0000007	M. RESISTOR CH 1/16W 0	1						
R1227, 28	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		ZA1	K4CD01000017	TERMINAL	1	
R1260, 61	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2						
R1262-67	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	6				MISCELLANEOUS		

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
	VSC6073	HEAT RADIATION PLATE	1		C514, 15	ECJ1VB1H472K	C. CAPACITOR CH 50V 4700P	2	
					C516-19	F3F1C685A045	T. CAPACITOR CH 16V 6.8U	4	
					C520	F1L1E1060018	C. CAPACITOR CH 25V 10U	1	
					C521-24	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4	
					C525	F1L1E1060018	C. CAPACITOR CH 25V 10U	1	
					C526	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
					C527	F1K1E1050001	C. CAPACITOR CH 25V 1U	1	
■ E2	VEP23678A	CAMERA P.C. BOARD	1	(RTL)	C528	F3F1D475A041	T. CAPACITOR CH 20V 4.7U	1	
					C530	ECJ1VF1E104Z	C. CAPACITOR CH 25V 0.1U	1	
					C531-36	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	6	
C100-02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C540, 41	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C103	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C600-02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C104-11	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	8		C603	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C113	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C604	ECJOEC1H330J	C. CAPACITOR CH 50V 33P	1	
C114-20	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	7		C605	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C121-23	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	3		C606-08	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C124-26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C609	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C203-05	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	3		C610	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C206-08	F3F1V105A032	T. CAPACITOR CH 35V 1U	3		C611	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C209-11	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	3		C612	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C212-19	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	8		C616, 17	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C220, 21	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C618	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C222	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	1		C619	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C223-26	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C621	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C227-29	F1L1A4760003	C. CAPACITOR CH 16V 47U	3		C622, 23	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C230-35	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	6		C700	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C236, 37	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	2		C701	ECJOEB1H272K	C. CAPACITOR CH 50V 2700P	1	
C238, 39	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C702	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C240-43	F3F1A106A046	T. CAPACITOR CH 10V 10U	4		C704	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C244-47	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C705	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C248, 49	F3F1A106A046	T. CAPACITOR CH 10V 10U	2		C707	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C250-52	F3G1A336A035	T. CAPACITOR CH 6.3V 33U	3		C708	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1	
C253	F3F1A106A046	T. CAPACITOR CH 10V 10U	1		C709	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1	
C254-59	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6		C710	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C260	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	1		C712	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C261	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C713	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C301	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C714	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C302	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C715, 16	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C304	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	1		C717	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C305	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C800	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C306	ECJ1VB0J105K	C. CAPACITOR CH 35V 1M	1		C801	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C307	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C802	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C309	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C803	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	1	
C310-13	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C804	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C314-17	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	4		C805	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C322, 23	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2		C806	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1	
C324, 25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C807	ECJOEB1A473K	C. CAPACITOR CH 10V 0.047U	1	
C340, 41	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C808	ECJOEC1H151J	C. CAPACITOR CH 50V 150P	1	
C343	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C809	ECUX1A224KBV	C. CAPACITOR CH 10V 0.22U	1	
C345	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C810	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C347	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C811	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	1	
C348-51	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	4		C900, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C352, 53	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C902	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C355	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C904-06	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C356	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C907	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C360, 61	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2		C908	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C362-64	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3		C909	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C366	ECJOEB1C103K	C. CAPACITOR CH 16V 0.01U	1		C910	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C400	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C911	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C401	F1K1E1050001	C. CAPACITOR CH 25V 1U	1		C913-15	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C402	F3F1D475A041	T. CAPACITOR CH 20V 4.7U	1		C916, 17	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2	
C403	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C918-20	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C404	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	1		C921, 22	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C409	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C923	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C417-19	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		C924	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C420-25	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	6		C1000	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C426-31	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	6		C1001, 02	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2	
C432-34	F1H1H104A783	C. CAPACITOR CH 50V 0.1U	3		C1003	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C435	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1		C1005	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C500	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1007, 08	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	2	
C501	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C1009, 10	ECJOEB1A473K	C. CAPACITOR CH 10V 0.047U	2	
C502	F1K1E1050001	C. CAPACITOR CH 25V 1U	1		C1011, 12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C503-06	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4		C1013	F1G1E392A062	C. CAPACITOR CH 25V 3900P	1	
C507	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C1014	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C508-10	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C1015	F1G1E392A062	C. CAPACITOR CH 25V 3900P	1	
C511, 12	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C1016, 17	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C513	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C1018	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	



Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C1019	ECUX1C105KBN	C. CAPACITOR CH 10V 1U	1		IC1100	C1AB00002467	IC	1	
C1020	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1101	COFBAG000068	IC	1	
C1022	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		IC1200	C1AB00002467	IC	1	
C1023, 24	ECJOEB1E472K	C. CAPACITOR CH 25V 4700P	2		IC1300	COEBA0000039	IC	1	
C1100	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1301	COEBD00000224	IC	1	
C1102	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC1302	COEBE0000348	IC	1	
C1103	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC1303	COEBJ00000243	IC	1	
C1105	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		IC1304	COJBAB0000619	IC	1	
C1106	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1						
C1107	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1		L100-05	JOJDC0000102	FILTER	6	
C1108	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L107	JOJDC0000102	FILTER	1	
C1110	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L200-17	JOJCC00000405	FERRITE CORE	18	
C1111	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1		L218-23	JOJCC00000119	FILTER	6	
C1112	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1		L300	JOJHC00000032	FILTER	1	
C1113	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L301-03	JOJDC0000102	FILTER	3	
C1114	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L304	JOJHC00000032	FILTER	1	
C1200, 01	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		L305-09	JOJDC0000102	FILTER	5	
C1203	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		L400, 01	JOJCC00000119	FILTER	2	
C1205	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L402	JOJHC00000032	FILTER	1	
C1206	F1G1C822A004	C. CAPACITOR CH 16V 8200P	1		L500-05	JOJCC00000119	FILTER	6	
C1207	ECJOEC1H390J	C. CAPACITOR CH 50V 39P	1		L600, 01	JOJCC00000119	FILTER	2	
C1208	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L701	JOJCC00000119	FILTER	1	
C1210	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L800	JOJDC0000102	FILTER	1	
C1211	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L900, 01	JOJCC00000119	FILTER	2	
C1300, 01	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		L1001, 02	JOJDC0000102	FILTER	2	
C1302	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		L1100	JOJDC0000102	FILTER	1	
C1303	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L1200	JOJDC0000102	FILTER	1	
C1304	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1						
C1305	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		Q500	UNR9113JOL	TRANSISTOR	1	
C1307	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		Q501	2SD2216JOL	TRANSISTOR	1	
C1308	ECJOEB1C223K	C. CAPACITOR CH 16V 0.022U	1		Q502	2SB1462JOL	TRANSISTOR	1	
					Q503	2SD2216JOL	TRANSISTOR	1	
CN1	K1KA60BA0028	CONNECTOR (MALE)	1		Q504	UNR9113JOL	TRANSISTOR	1	
CN2	K1MN51B00014	CONNECTOR	1		Q505	2SD2216JOL	TRANSISTOR	1	
CN3	K1KACOBA0029	CONNECTOR (FEMALE)	1		Q506	XP1401	TRANSISTOR-RESISTOR	1	
CN4	K1KB50BA0015	CONNECTOR (FEMALE)	1		Q507	XP1501	TRANSISTOR-RESISTOR	1	
					Q508	2SB1218AOL	TRANSISTOR	1	
D401	MA6X12100L	DIODE	1		Q509	2SD2216JOL	TRANSISTOR	1	
					Q510	2SB1462JOL	TRANSISTOR	1	
FL200-11	F1H0J1050022	C. CAPACITOR CH6.3V 1U	12		Q511	2SD1819AOL	TRANSISTOR	1	
FL300, 01	F1H0J1050022	C. CAPACITOR CH6.3V 1U	2		Q700	UNR9215JOL	TRANSISTOR	1	
					Q800, 01	2SC6054JOL	TRANSISTOR	2	
IC100, 01	COBCBC000048	IC	2						
IC102	COJBAB000717	IC	1		R1-R6	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	6
IC103	COJBAA000307	IC	1		R100	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC104	COJBAA000374	IC	1		R102, 03	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	2
IC105	COJBAA000625	IC	1		R104	JOJDC0000102	FILTER	1	
IC106	COJBAA000374	IC	1		R105, 06	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	2
IC108	COJBAA000374	IC	1		R108-10	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	3
IC200-02	COZBZ0001532	IC	3		R112-14	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	3
IC203	COBCAC000060	IC	1		R115	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	1
IC204-06	COBCBC000048	IC	3		R116	ERJ2GEJ470	M. RESISTOR CH 1/16W	47	1
IC207	COCBAA000008	IC	1		R208-10	DOYAR0000007	M. RESISTOR CH 1/16W	0	3
IC301	C1ZBZ0003921	IC	1		R214-25	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	12
IC302	COBCAC000061	IC	1		R244-50	DOYAR0000007	M. RESISTOR CH 1/16W	0	7
IC304	COJBAB000619	IC	1		R256	EXB28V473J	COMBI. R-R	47K	1
IC307	COJBZ002248	IC	1		R257	ERJ2GEJ473	M. RESISTOR CH 1/16W	47K	1
IC308	COJBZ000606	IC	1		R259-76	DOYAR0000007	M. RESISTOR CH 1/16W	0	18
IC309, 10	COJBZ002906	IC	2		R300-08	ERJ2GEJ101	M. RESISTOR CH 1/16W	100	9
IC401-03	C1AB00002039	IC	3		R311	ERJ2GEJ100	M. RESISTOR CH 1/16W	10	1
IC500	CODBEZ000009	IC	1		R312	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC501, 02	COBCDC000008	IC	2		R313-21	EXBN8V330J	COMBI. R-R	33	9
IC600	COGBF0000016	IC	1		R322	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC601	C1BB00001090	IC	1		R324, 25	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	2
IC603	COBCDC000008	IC	1		R326	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	1
IC604	COBCDC000039	IC	1		R327-29	EXBN8V330J	COMBI. R-R	33	3
IC605	COABCA000064	IC	1		R330-32	DOYAR0000007	M. RESISTOR CH 1/16W	0	3
IC700	COBCBC000048	IC	1		R333	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	1
IC701	C1AB00002467	IC	1		R334	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC702, 03	COJBAB000621	IC	2		R335, 36	ERJ2GEJ103	M. RESISTOR CH 1/16W	10K	2
IC800	COABCA000064	IC	1		R337	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC801	COABBA000201	IC	1		R338-41	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	4
IC900, 01	COGB60000028	IC	2		R346, 47	ERJ2GEJ330	M. RESISTOR CH 1/16W	33	2
IC902	COBCDC000039	IC	1		R348, 49	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	2
IC903	COABCA000064	IC	1		R351, 52	DOYAR0000007	M. RESISTOR CH 1/16W	0	2
IC904	COBCDC000039	IC	1		R355	DOYAR0000007	M. RESISTOR CH 1/16W	0	1
IC1000	C1AB00002145	IC	1		R358	ERJ2GEJ220	M. RESISTOR CH 1/16W	22	1

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R359	EXB28V473J	COMBI. R-R 47K	1	
R361	EXB28V473J	COMBI. R-R 47K	1	
R362	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R363	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R365	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R366	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R367, 68	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R370	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R375	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R376, 77	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
R400-02	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	3	
R403-05	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3	
R407	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R409	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R411	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R421-23	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	3	
R500	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R501	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R502	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
R503	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R504	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R505	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R506	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1	
R507	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R508	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R509	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
R510	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
R511	ERJ2GEJ562	M. RESISTOR CH 1/16W 5.6K	1	
R512	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	1	
R513	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R515	ERJ2GEJ563	M. RESISTOR CH 1/16W 56K	1	
R517, 18	ERJ2GEJ222	M. RESISTOR CH 1/16W 2.2K	2	
R519, 20	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	2	
R521	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R524	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R527	ERJ2RHD224	M. RESISTOR CH 1/16W 220K	1	
R528	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R529	ERJ2RHD124	M. RESISTOR CH 1/16W 120K	1	
R530	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R531	ERJ2RHD182	M. RESISTOR CH 1/16W 1.8K	1	
R532	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R536, 37	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R600	ERAS39J5R6	M. RESISTOR 5.6	1	
R601	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R602	ERJ2RHD821	M. RESISTOR CH 1/16W 820	1	
R603	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R604	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R605	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R608	ERJ2RHD362	M. RESISTOR CH 1/16W 3.6K	1	
R609	ERAS39J5R6	M. RESISTOR 5.6	1	
R610	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R611, 12	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R613	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R614	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R615	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1	
R616	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R617	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	1	
R622	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R626	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R700, 01	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	2	
R702	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R703	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R704	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1	
R705	DOGB1R5JA057	M. RESISTOR CH 1/16W 1.5	1	
R706	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R707	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
R708, 09	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2	
R710, 11	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2	
R712, 13	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R714, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R716	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R717, 18	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R719	ERJ2GEJ391	M. RESISTOR CH 1/16W 390	1	
R720, 21	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
R722, 23	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	2	
R728, 29	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R734-36	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R737	ERJ2GEJ150	M. RESISTOR CH 1/16W 15	1	
R800	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R803	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R804	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1	
R805	ERJ3GEY682	M. RESISTOR CH 1/16W 6.8K	1	
R806	ERJ2GEJ121	M. RESISTOR CH 1/16W 120	1	
R807	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R808, 09	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R810	ERJ3GEYJ224	M. RESISTOR CH 1/16W 220K	1	
R811	ERJ2GEJ474	M. RESISTOR CH 1/16W 470K	1	
R812	ERJ2GEJ223	M. RESISTOR CH 1/16W 22K	1	
R813, 14	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	2	
R815	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R816	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	1	
R817	ERJ2GEJ154	M. RESISTOR CH 1/16W 150K	1	
R818	ERJ3GEYJ223	M. RESISTOR CH 1/16W 22K	1	
R819	ERJ3GEY6472	M. RESISTOR CH 1/16W 4.7K	1	
R820	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1	
R821	ERJ2GEJ563	M. RESISTOR CH 1/16W 56K	1	
R822	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	1	
R823	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	1	
R824	ERJ2GEJ221	M. RESISTOR CH 1/16W 220	1	
R826	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R830, 31	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R902	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R903	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R904	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R905	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R906	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R907	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1	
R908	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R909	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R910	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R911	ERJ2RHD333	M. RESISTOR CH 1/16W 33K	1	
R912	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R913	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R914	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R915	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	1	
R916	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R917	ERJ2RHD203	M. RESISTOR CH 1/16W 20K	1	
R918, 19	ERJ2GEJ273	M. RESISTOR CH 1/16W 27K	2	
R1000	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1001	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1002	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1005	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1006	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1007	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1008	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1009	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1010-12	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	3	
R1013, 14	DOGB154JA057	M. RESISTOR CH 1/16W 150K	2	
R1015-17	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	3	
R1018, 19	ERJ2GEJ182	M. RESISTOR CH 1/16W 1.8K	2	
R1020, 21	ERJ2GEJ393	M. RESISTOR CH 1/16W 39K	2	
R1022	ERJ3GEYJ433	M. RESISTOR CH 1/16W 43K	1	
R1025	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1026	ERJ3GEYJ333	M. RESISTOR CH 1/16W 33K	1	
R1027	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1028, 29	ERJ3GEYJ3R3	M. RESISTOR CH 1/16W 3.3	2	
R1033, 34	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R1100	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1101	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1	
R1102	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
R1103	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1104	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
R1105, 06	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2	
R1107, 08	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2	
R1109, 10	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R1111, 12	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R1113	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1114, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R1116	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1117	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R1200	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1201	ERJ2GEJ681	M. RESISTOR CH 1/16W 680	1	
R1202	ERJ2GEJ100	M. RESISTOR CH 1/16W 10	1	
R1203	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1204	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
R1205, 06	ERJ2GEJ124	M. RESISTOR CH 1/16W 120K	2	
R1207, 08	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	2	
R1209, 10	ERJ2GEJ224	M. RESISTOR CH 1/16W 220K	2	
R1211, 12	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R1213	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1214, 15	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
R1216-18	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
R1300	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	1	
R1301-08	DOYAR0000007	M. RESISTOR CH 1/16W 0	8	
X100	H1A7415B0004	CRYSTAL OSCILLATOR	1	
X101	H1A7425B0001	CRYSTAL OSCILLATOR	1	
■ E4	VEP001W7B	R SIDE P. C. BOARD	1	(RTL)
B1400	N4EZHZ720001	BATTERY	1	
C1400	F3H1V106A049	T. CAPACITOR CH 35V 10U	1	
C1401, 02	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	2	
C1403	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C1404	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1	
C1405, 06	F3H1C226A063	T. CAPACITOR CH 25V 22U	2	
C1407, 08	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C1434-36	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	3	
C1437, 38	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C1441, 42	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	2	
C1445, 46	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	2	
C1449	ECJOEC1H220J	C. CAPACITOR CH 50V 22P	1	
C1451	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1452	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1453	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
C1455-57	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	3	
C1464	ECJ3YB1C225K	C. CAPACITOR CH 16V 2.2M	1	
C1466, 67	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1468	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1469	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1471	ECJ1VB1C104K	C. CAPACITOR CH 16V 0.1U	1	
C1472	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1473	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1474	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1475, 76	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2	
C1477	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
C1478	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1479	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
C1480	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1481	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1482	F3G1C156A028	T. CAPACITOR CH 16V 15U	1	
C1483	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1484	F1K1A225A007	C. CAPACITOR CH 10V 2.2U	1	
C1485	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C1487	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C1490	ECJ2FBOJ106K	C. CAPACITOR CH 50V 10U	1	
CN1400	K1MN50B00043	CONNECTOR	1	
CN1401	K1KY08AA0710	CONNECTOR	1	
CN1402	K1MN16BA0059	CONNECTOR	1	
CN1403	K1MN06BA0252	CONNECT	1	
CN1404	K1MN30BA0059	CONNECTOR	1	
D1400	MA111	DIODE	1	
D1401-04	MA3S781DOL	DIODE	4	
D1408-15	MA3S781DOL	DIODE	8	
D1416	B3AAB0000197	TRANSISTOR	1	
D1417	MA3S781DOL	DIODE	1	
IC1400	AN77L09M	IC	1	
IC1401	COABBB000271	IC	1	
IC1405	COCBBC000053	IC	1	
IC1409	COCBAGE00012	IC	1	
IC1410	C1AB00002388	IC	1	
IC1411, 12	COJBAS000249	IC	2	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
L1401, 02	JOJDC0000102	FILTER	2	
L1405, 06	JOJDC0000102	FILTER	2	
Q1400	XP0431N00L	TRANSISTOR	1	
Q1401	2SB095600L	TRANSISTOR	1	
Q1402	2SD2216JOL	TRANSISTOR	1	
Q1403	XP0431N00L	TRANSISTOR	1	
R1400, 01	ERJ6GEYG102	M. RESISTOR CH 1/10W 1K	2	
R1404, 05	ERJ3RBD104	M. RESISTOR CH 1/16W 100K	2	
R1406-09	ERJ3RBD223	M. RESISTOR CH 1/16W 22K	4	
R1410	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
R1411	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R1412	ERJ3RBD822	M. RESISTOR CH 1/16W 8.2K	1	
R1413	ERJ3RBD562	M. RESISTOR CH 1/16W 5.6K	1	
R1414-31	ERJ2GEJ560	M. RESISTOR CH 1/16W 56	18	
R1432, 33	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	2	
R1435	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	1	
R1438-40	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
R1442-44	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
R1445, 46	EXBN8V470J	COMBI. R-R 47	2	
R1447-49	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
R1451-53	ERJ2GEJ101	M. RESISTOR CH 1/16W 100	3	
R1457	ERJ2GEJ473	M. RESISTOR CH 1/16W 47K	1	
R1458	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1	
R1467	ERJ3GEYJ470	M. RESISTOR CH 1/16W 47	1	
R1468	ERJ2GEJ181	M. RESISTOR CH 1/16W 180	1	
R1470	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	1	
R1471	ERJ2GEJ821	M. RESISTOR CH 1/16W 820	1	
R1472	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
R1473	ERJ2GEJ333	M. RESISTOR CH 1/16W 33K	1	
R1474	ERJ2GEJ272	M. RESISTOR CH 1/16W 2.7K	1	
R1481	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R1482	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R1483	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R1484	ERJ3RBD103	M. RESISTOR CH 1/16W 10K	1	
R1485	ERJ3RBD102	M. RESISTOR CH 1/16W 1K	1	
R1486	ERJ2GEJ330	M. RESISTOR CH 1/16W 33	1	
RM1400	B3RBB0000011	DIODE	1	
SW1400, 01	EVQPLPA08	SWITCH	2	
SW1402, 03	KOH1BA000442	SWITCH	2	
SW1404	KOKABA000013	SWITCH	1	
SW1405	KOD122A00126	SWITCH	1	
SW1409	KOD122A00126	SWITCH	1	
SW1410, 11	KOH1BA000442	SWITCH	2	
SW1412	KOD122A00126	SWITCH	1	
SW1413	KOD123A00076	SWITCH	1	
SW1414-16	KOH1BA000442	SWITCH	3	
SW1417	KOD122A00126	SWITCH	1	
SW1418-21	KOH1BA000442	SWITCH	4	
SW1422	KOD122A00126	SWITCH	1	
VR1400, 01	D2BBA14A0002	V. RESISTOR 10K	2	
VR1402, 03	EVM3YSX50B14	V. RESISTOR 10K	2	
		MISCELLANEOUS		
	VG08615	AUDIO VR COVER	1	
	VGU0D57	AUDIO ROTARY KNOB	2	
	VGH5072	KNOB HINGE SEAL	1	
■ E5	VEP001W1A	CAM OP P. C. BOARD	1	(RTL)
CN100	K1MN16BA0059	CONNECTOR	1	
CN101	K1MN06BA0252	CONNECT	1	
D100-05	MA3S781DOL	DIODE	6	
D107	MA3S781DOL	DIODE	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
SW100	KOD113B00029	SWITCH	1		C338	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
SW101-03	KOMZ11000005	SWITCH	3		C339	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1	
SW104-08	EVQPLPA08	SWITCH	5		C340-43	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	4	
					C344	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
					C345-48	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	4	
					C349	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
					C350	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
					C351	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
■ E6	VEP01A12A	POWER P.C. BOARD	1	(RTL)	C352	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
					C353	EEFCD0G101	E. CAPACITOR 4V 100U	1	
					C354	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
C101, 02	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	2		C355	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C103	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		C356	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C104	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C357	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C105-08	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	4		C358	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C109	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C359	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C110	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		C360	F3G1C106A028	T. CAPACITOR CH 16V 10U	1	
C112	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C362, 63	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C113	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1		C364	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C114-18	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	5		C366	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1	
C120	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1		C367, 68	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	2	
C121, 22	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		C370	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1	
C124	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C371, 72	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
C125, 26	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C373	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C127, 28	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	2		C374-76	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	3	
C129	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C401	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C130, 31	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C402	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1	
C132	ECJOEB1E332K	C. CAPACITOR CH 25V 3300P	1		C403	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C133	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C404	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
C134	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C405	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	1	
C201, 02	EEFCD0D151	E. CAPACITOR 2V 150U	2		C406	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	1	
C203	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C408	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	1	
C204	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1		C409	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1	
C205, 06	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	2		C410	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1	
C207	ECJOEB1A683K	C. CAPACITOR CH 10V 0.068U	1		C411	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1	
C208	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1		C412	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1	
C209	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C414	ECJOEB1H681K	C. CAPACITOR CH 50V 680P	1	
C210, 11	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C417	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C212	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1		C418	ECJOEB1H681K	C. CAPACITOR CH 50V 680P	1	
C213, 14	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	2		C420	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
C215	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C421, 22	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C216	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		C423-25	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	3	
C217	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C426-28	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	3	
C218	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C429-32	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	4	
C219	ECJOEC1H101J	C. CAPACITOR CH 50V 100P	1		C433	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1	
C220	ECJOEB1A823K	C. CAPACITOR CH 10V 0.082U	1		C435, 36	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	2	
C221, 22	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2		C437	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C223	ECJOEB1E682K	C. CAPACITOR CH 25V 6800P	1		C438	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1	
C224	EEFCD0E121	E. CAPACITOR 2.5V 120U	1		C439, 40	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2	
C225	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		C441	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1	
C227	EEFCD0E121	E. CAPACITOR 2.5V 120U	1		C442	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C302	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		C443	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1	
C303	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1		C444	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C304	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	1		C445	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C305	ECJOEB1H681K	C. CAPACITOR CH 50V 680P	1		C446	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C306	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	1		C447, 48	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	2	
C307	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	1		C449	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1	
C308	ECJOEB1H681K	C. CAPACITOR CH 50V 680P	1		C450	ECJ2FB1E105K	C. CAPACITOR CH 25V 1U	1	
C309	ECJOEB1H471K	C. CAPACITOR CH 50V 470P	1		C451	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C310	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	1		C452, 53	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C311	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1		C454	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C312	ECJOEC1H221J	C. CAPACITOR CH 50V 220P	1		C455	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C313	ECJOEB1E562K	C. CAPACITOR CH 25V 5600P	1		C456	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C314	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		C458	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C315	ECJOEC1H181J	C. CAPACITOR CH 50V 180P	1		C459	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C316	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1		C460	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C317	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		C461	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C318	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		C462	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C319	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1		C463	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C320	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		C465	ECJ3YB1E106K	C. CAPACITOR CH 25V 10U	1	
C321-23	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	3		C466, 67	ECJ1VB1H104K	C. CAPACITOR CH 50V 0.1U	2	
C324-28	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	5		C468	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C329-31	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	3		C469	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1	
C332	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	1		C470	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1	
C333-35	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	3		C471	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1	
C336	ECJ2FB1C475K	C. CAPACITOR CH 16V 4.7U	1		C472	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	
C337	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		C474	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1	

Components identified with the mark  $\Delta$  have the special characteristics for safety.  
When replacing any of these components, use only the same type.

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C475	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D553-55	MAZ82000HL	DIODE	3	
C476	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D557	MA8043-M	DIODE	1	
C477	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D558	MAZ80510ML	DIODE	1	
C478	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D559	MAZ80750HL	DIODE	1	
C479	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D560	MAZ80620ML	DIODE	1	
C481	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		D561	MAZ80360HL	DIODE	1	
C482	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		D562	MA8043-M	DIODE	1	
C483	ECJ2FB1A475K	C. CAPACITOR CH 10V 4.7U	1		D563	MA8068-M	DIODE	1	
C484	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		D564	MAZ80620ML	DIODE	1	
C485	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		D565, 66	MAZ80910HL	DIODE	2	
C486	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	1		D567, 68	MAZ81000HL	DIODE	2	
C487	ECJOEB1H561K	C. CAPACITOR CH 50V 560P	1		D569	MA8130-M	DIODE	1	
C488	ECJ1VB1A224K	T. CAPACITOR CH 10V 0.22U	1						
C489	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		IC101	COEBJ0000074	IC	1	
C490	ECJOEC1H470J	C. CAPACITOR CH 50V 47P	1		IC102	COCBABB00075	IC	1	
C491, 92	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC103, 04	COEBE0000348	IC	2	
C493, 94	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	2		IC201	COBAYY00392	IC	1	
C495	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		IC301	COBBAZZ00094	IC	1	
C551, 52	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		IC302	COBAYY00386	IC	1	
C553	ECJOEB1A683K	C. CAPACITOR CH 10V 0.068U	1		IC401	COBBAZZ00094	IC	1	
C554	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		IC402, 03	COBAYY00386	IC	2	
C555	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1		IC551	COBBAB000020	IC	1	
C556	ECJOEB1H331K	C. CAPACITOR CH 50V 330P	1		IC552	COBAYY00386	IC	1	
C557	ECJ3YB1C106K	C. CAPACITOR CH 16V 10U	1		IC553	COEBC0000205	IC	1	
C558	F1L2A225A026	C. CAPACITOR CH100V 2.2U	1		IC554	COEBD0000140	IC	1	
C560	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1						
C561	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L101, 02	JOJHC0000048	FILTER	2	
C562	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L103	JOJJC0000022	FILTER	1	
C563	F1L2A225A026	C. CAPACITOR CH100V 2.2U	1		L201	JOJHC0000048	FILTER	1	
C564	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L203	G1C100M00030	COIL 10UH	1	
C565	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L204, 05	JOJBC0000107	FILTER	2	
C566	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	1		L206	G1C150MA0226	COIL 15UH	1	
C567	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		L208	JOJHC0000048	FILTER	1	
C568	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	1		L210	JOJJC0000022	FILTER	1	
C571, 72	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2		L301-04	JOJBC0000107	FILTER	4	
C573	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		L305	G1A470EA0018	COIL 47UH	1	
C574, 75	ECJOEB1H102K	C. CAPACITOR CH 50V 1000P	2		L306, 07	G1C220MA0226	COIL 22UH	2	
C576	ECJOEB1E103K	C. CAPACITOR CH 25V 0.01U	1		L308	G1C2R2MA0072	COIL 2.2UH	1	
					L309	G1A470EA0018	COIL 47UH	1	
CN101	K1KA06BA0104	CONNECTOR (MALE)	1		L310	G1C2R2MA0072	COIL 2.2UH	1	
CN102	K1KYCOA0555	CONNECTOR	1		L311, 12	JOJJC0000022	FILTER	2	
					L314	JOJJC0000022	FILTER	1	
D103	BOACPM000002	DIODE	1		L315	G1C2R2MA0072	COIL 2.2UH	1	
D105	MAZ81000HL	DIODE	1		L316	G1C220MA0024	COIL 22UH	1	
D106	MAZ80910HL	DIODE	1		L317	G1C2R2MA0072	COIL 2.2UH	1	
D109	MAZ81000HL	DIODE	1		L318	JOJBC0000107	FILTER	1	
D110	MA3S132EOL	DIODE	1		L319	G1C2R2MA0072	COIL 2.2UH	1	
D111	MAZ81000HL	DIODE	1		L320, 21	JOJJC0000022	FILTER	2	
D112	MA2S11100L	DIODE	1		L401-03	JOJBC0000107	FILTER	3	
D113	MA3S132EOL	DIODE	1		L405	G1A470EA0018	COIL 47UH	1	
D114	MA2S11100L	DIODE	1		L406	G1C220MA0226	COIL 22UH	1	
D118	MA2S11100L	DIODE	1		L408, 09	JOJJC0000022	FILTER	2	
D119	MAZ81000HL	DIODE	1		L410	G1C150MA0226	COIL 15UH	1	
D123	MA3S132EOL	DIODE	1		L411	JOJJC0000022	FILTER	1	
D125	MA2S11100L	DIODE	1		L413-16	G1C100KA0055	COIL 10UH	4	
D201-06	MA22D2800L	DIODE	6		L419	G1C101MA0024	COIL 100UH	1	
D301	MA3S132EOL	DIODE	1		L420	JOJBC0000107	FILTER	1	
D302	MA22D2800L	DIODE	1		L421-23	JOJJC0000022	FILTER	3	
D304	MA2S11100L	DIODE	1		L424	JOJBC0000107	FILTER	1	
D307-10	MA22D2800L	DIODE	4		L425-27	JOJJC0000022	FILTER	3	
D311	MA3J70000L	DIODE	1		L551	G1A330FA0007	COIL 33UH	1	
D312	MA22D2800L	DIODE	1		L552	JOJBC0000107	FILTER	1	
D313	MA2S11100L	DIODE	1		L553	G1C100KA0055	COIL 10UH	1	
D403	MA22D2800L	DIODE	1		L554	JOJJC0000022	FILTER	1	
D406	MA22D2800L	DIODE	1						
D408, 09	MA22D2800L	DIODE	2		$\Delta$ PA101	K5H1021A0004	IC	1	
D410	BOHCMM000014	DIODE	1						
D411	MA2Z00100L	DIODE	1		Q101	XP0431600L	TRANSISTOR	1	
D412	BOHCMM000014	DIODE	1		Q102	UNR9213JOL	TRANSISTOR	1	
D413	MA2Z00100L	DIODE	1		Q103-06	XP0421600L	TRANSISTOR	4	
D414	MA22D2800L	DIODE	1		Q107, 08	UNR9115JOL	TRANSISTOR	2	
D416	MA22D2800L	DIODE	1		Q109	B1CBGD000001	TRANSISTOR	1	
D417	MAZ81500ML	DIODE	1		Q110	XP0431600L	TRANSISTOR	1	
D418	MA8130-M	DIODE	1		Q111-14	XP0421600L	TRANSISTOR	4	
D419	MA3S132EOL	DIODE	1		Q115	B1DHGD000019	TRANSISTOR	1	
D551	MA2S11100L	DIODE	1		Q117	XP0421600L	TRANSISTOR	1	
D552	BOHCMM000014	DIODE	1		Q118	UNR9113JOL	TRANSISTOR	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
Q119	UNR9115JOL	TRANSISTOR	1		R154	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q120, 21	UNR9213JOL	TRANSISTOR	2		R155-58	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	4	
Q123	UNR9213JOL	TRANSISTOR	1		R159	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q124	UNR9113JOL	TRANSISTOR	1		R161	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q126	UNR9113JOL	TRANSISTOR	1		R162	ERJ2RHD204	M. RESISTOR CH 1/16W 20K	1	
Q127	UNR9213JOL	TRANSISTOR	1		R163	ERJ2RHD623	M. RESISTOR CH 1/16W 62K	1	
Q128	UNR9113JOL	TRANSISTOR	1		R164, 65	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
Q129	XP0431600L	TRANSISTOR	1		R166	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
Q130	UNR9113JOL	TRANSISTOR	1		R167	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
Q131	UNR9213JOL	TRANSISTOR	1		R169-71	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3	
Q201, 02	B1MBEDA00015	TRANSISTOR	2		R172	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
Q301-03	XP0421600L	TRANSISTOR	3		R180	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q305-07	XP0440100L	TRANSISTOR	3		R181	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
Q308, 09	B1CHQD000008	TRANSISTOR	2		R182	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q310	B1CFRD000023	TRANSISTOR	1		R184	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
Q311	XP0440100L	TRANSISTOR	1		R185	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
Q312	B1CHQD000008	TRANSISTOR	1		R186	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
Q313	B1CFRD000023	TRANSISTOR	1		R187, 88	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
Q314	B1CHQD000008	TRANSISTOR	1		R189, 90	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	2	
Q315, 16	B1DFCD000012	TRANSISTOR	2		R191	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
Q317	XP0421600L	TRANSISTOR	1		R193	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
Q401-03	XP0421600L	TRANSISTOR	3		R196	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
Q404-06	XP0440100L	TRANSISTOR	3		R197	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
Q407	B1CHQD000008	TRANSISTOR	1		R201	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q408	XP0440100L	TRANSISTOR	1		R202	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q409	B1DFCL000008	TRANSISTOR	1		R203	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
Q410	B1CFRD000023	TRANSISTOR	1		R204	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
Q411	B1CHQD000008	TRANSISTOR	1		R205	ERJ2RHD471	M. RESISTOR CH 1/16W 470	1	
Q412	B1CFRD000023	TRANSISTOR	1		R206, 07	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
Q413	B1CHQD000008	TRANSISTOR	1		R208	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q414	XP0431600L	TRANSISTOR	1		R209	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
Q415	UNR9113JOL	TRANSISTOR	1		R211-13	ERJ3RSFR10	M. RESISTOR CH 1/16W 0.1	3	
Q416	B1DFCD000012	TRANSISTOR	1		R216	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
Q417	B1CBGD000001	TRANSISTOR	1		R218-20	ERJ3RSFR10	M. RESISTOR CH 1/16W 0.1	3	
Q418	XP0421600L	TRANSISTOR	1		R221	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
Q419	B1CBGD000001	TRANSISTOR	1		R222, 23	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
Q420	XP0421600L	TRANSISTOR	1		R224	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q421	XP0431600L	TRANSISTOR	1		R225	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
Q422	XP0421600L	TRANSISTOR	1		R226	ERJ2RHD561	M. RESISTOR CH 1/16W 560	1	
Q551	XP0431600L	TRANSISTOR	1		R227	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
Q552	B1CHQD000008	TRANSISTOR	1		R228	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
Q553	XP0440100L	TRANSISTOR	1		R229	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
Q554	B1DFCL000008	TRANSISTOR	1		R230	ERJ3RSFR10	M. RESISTOR CH 1/16W 0.1	1	
Q555-58	XP0421600L	TRANSISTOR	4		R301	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
Q559	UNR9213JOL	TRANSISTOR	1		R302	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
					R303	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R101-04	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	4		R304	ERJ2RKD334	M. RESISTOR CH 1/16W 330K	1	
R105	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1		R305	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R106-08	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	3		R306-09	ERJ2RHD101	M. RESISTOR CH 1/16W 100	4	
R109	ERJ2RKD684	M. RESISTOR CH 1/16W 680K	1		R310	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R110-12	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	3		R311	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R113-16	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	4		R312	ERJ2RHD561	M. RESISTOR CH 1/16W 560	1	
R117, 18	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	2		R313	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R119	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1		R314	ERJ2RHD273	M. RESISTOR CH 1/16W 27K	1	
R120	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R315	ERJ2RHD752	M. RESISTOR CH 1/16W 7.5K	1	
R121, 22	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R316	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R123	ERJ2RKD334	M. RESISTOR CH 1/16W 330K	1		R317	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R124	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R318	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R125	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R319	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R126, 27	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	2		R320	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R128	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1		R321	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R129	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1		R322	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
R130	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1		R323	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
R131	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1		R324	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R132, 33	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R325	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R134	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	1		R326	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
R135	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1		R327	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R136	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1		R328	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R137-40	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	4		R329	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R142, 43	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	2		R330	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1	
R145	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1		R331	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R146, 47	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R332	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1	
R148	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1		R333, 34	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	2	
R149	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1		R335	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
R150, 51	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	2		R336	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	1	
R152	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R337	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R153	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R338	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R339	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R448	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R340	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R449	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R341	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R450	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R342	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R451	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1	
R343	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R453	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
R346	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1		R454	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	1	
R347, 48	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R455	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R349	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	1		R456	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R350	ERJ3BQFR33	M. RESISTOR CH 1/16W 0.33	1		R457	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R351	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R459	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R352	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1		R460	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R353, 54	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	2		R461	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	1	
R355, 56	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	2		R463	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R357	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R464	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R358	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R465	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R359	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R467	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R360, 61	DOYAR0000007	M. RESISTOR CH 1/16W 0	2		R469	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R362, 63	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	2		R470	ERJ3BQFR33	M. RESISTOR CH 1/16W 0.33	1	
R364	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R471	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R365	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R472, 73	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R367	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R474	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R368	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1		R475	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R370	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R476	ERJ8GEYJ100	M. RESISTOR CH 1/8W 10	1	
R371	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R477, 78	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	2	
R372	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1		R479, 80	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R373	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1		R481	ERJ2GEJ105	M. RESISTOR CH 1/16W 1M	1	
R374	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R482	ERJ8GEYJ151	M. RESISTOR CH 1/8W 150	1	
R375	ERJ2RKD684	M. RESISTOR CH 1/10W 470K	1		R483	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R376	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1		R484	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R377	ERJ2RHD752	M. RESISTOR CH 1/16W 7.5K	1		R485	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	
R378	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1		R486	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R379	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R487	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R380	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R488	ERJ2RKD684	M. RESISTOR CH 1/10W 680K	1	
R382	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R489	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1	
R386	ERJ3BQFR33	M. RESISTOR CH 1/16W 0.33	1		R490	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R388	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1		R491	ERJ2RHD822	M. RESISTOR CH 1/16W 8.2K	1	
R389	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R492, 93	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2	
R390	ERJ2RKD124	M. RESISTOR CH 1/16W 120K	1		R494	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	
R391	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R495	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R392	ERJ3BQFR33	M. RESISTOR CH 1/16W 0.33	1		R496	ERJ3GEYJ222	M. RESISTOR CH 1/16W 2.2K	1	
R400	ERJ3BQFR33	M. RESISTOR CH 1/16W 0.33	1		R497	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
R401	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	1		R498	ERJ2RHD152	M. RESISTOR CH 1/16W 1.5K	1	
R402-05	ERJ2RHD101	M. RESISTOR CH 1/16W 100	4		R499, 00	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2	
R408	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R501	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1	
R409	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1		R502	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R410	ERJ2RKD184	M. RESISTOR CH 1/16W 180K	1		R503	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R411	ERJ2RKD684	M. RESISTOR CH 1/10W 680K	1		R504	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R412	ERJ2RKD154	M. RESISTOR CH 1/16W 150K	1		R505	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R413	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	1		R506, 07	DOYAR0000007	M. RESISTOR CH 1/16W 0	2	
R414	ERJ2RHD183	M. RESISTOR CH 1/16W 18K	1		R551	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R415, 16	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	2		R552	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1	
R417	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R553	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R418	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R554	ERJ2RHD101	M. RESISTOR CH 1/16W 100	1	
R419	ERJ2RHD242	M. RESISTOR CH 1/16W 2.4K	1		R555, 56	ERJ2RKD224	M. RESISTOR CH 1/16W 220K	2	
R420	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1		R557	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R421	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1		R558	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R422	ERJ2RHD752	M. RESISTOR CH 1/16W 7.5K	1		R559	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R423	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R560	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R424	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R561	ERJ2RKD334	M. RESISTOR CH 1/10W 330K	1	
R425	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R562, 63	ERJ2RHD563	M. RESISTOR CH 1/16W 56K	2	
R426	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R564	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R427	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		R565	ERJ3BQFR22	M. RESISTOR CH 1/16W 0.22	1	
R428	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1		R566	ERJ2RHD122	M. RESISTOR CH 1/16W 1.2K	1	
R429	ERJ2RHD222	M. RESISTOR CH 1/16W 2.2M	1		R567, 68	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	2	
R430	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1		R569	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	
R431	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R570	ERJ2RKD474	M. RESISTOR CH 1/10W 470K	1	
R434, 35	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	2		R572	ERJ2RHD103	M. RESISTOR CH 1/16W 10K	1	
R436	ERJ2RHD153	M. RESISTOR CH 1/16W 15K	1		R573	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1	
R439	ERJ2RHD182	M. RESISTOR CH 1/16W 1.8K	1		R574	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1	
R440	ERJ2RHD243	M. RESISTOR CH 1/16W 24K	1		R575, 76	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	2	
R441	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1		R577	ERJ2RHD303	M. RESISTOR CH 1/16W 30K	1	
R442	ERJ2RHD393	M. RESISTOR CH 1/16W 39K	1		R578	ERJ2RHD104	M. RESISTOR CH 1/16W 100K	1	
R443	ERJ2RKD274	M. RESISTOR CH 1/16W 270K	1		R579	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R444	ERJ2RHD102	M. RESISTOR CH 1/16W 1K	1		R580	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1	
R445	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1		R581	ERJ2RHD473	M. RESISTOR CH 1/16W 47K	1	
R446	ERJ2RHD683	M. RESISTOR CH 1/16W 68K	1		R582, 83	ERJ3GEYJ102	M. RESISTOR CH 1/16W 1K	2	
R447	ERJ2RKD204	M. RESISTOR CH 1/16W 20K	1		R584	DOYAR0000007	M. RESISTOR CH 1/16W 0	1	







Components identified with the mark  have the special characteristics for safety. When replacing any of these components, use only the same type.

[illegible]

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks	Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
SW351	KOH1BA000442	SWITCH	1		R202, 03	ERJ2GEJ332	M. RESISTOR CH 1/16W 3.3K	2	
					R204, 05	ERJ2GEJ394	M. RESISTOR CH 1/16W 390K	2	
VR351	D2B1B15B0001	V. RESISTOR 100K	1		R206, 07	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
					R208, 09	ERJ2GEJ472	M. RESISTOR CH 1/16W 4.7K	2	
					R210, 11	ERJ2GEJ274	M. RESISTOR CH 1/16W 270K	2	
					R212, 13	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	2	
					R214	ERJ2GEJ103	M. RESISTOR CH 1/16W 10K	1	
■ E22	VEP08356A	LCD LEV P. C. BOARD	1	(RTL)					
C1003	F3G1C106A028	T. CAPACITOR CH 16V 10U	1		■ E24	VEP001W4A	EVF CON P. C. BOARD	1	(RTL)
C1014	F3F1A106A046	T. CAPACITOR CH 10V 10U	1						
C1017	F1L1C106A007	C. CAPACITOR CH 16V 10U	1						
C1019	ECJOEF1C104Z	C. CAPACITOR CH 16V 0.1U	1		C651, 52	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	2	
C1025	ECJ2FB1C225K	C. CAPACITOR CH 16V 2.2U	1						
C1026	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1		CN651	K1MN22BA0197	CONNECTOR	1	
					CN652	K1MN20BA0197	CONNECTOR	1	
D1001	MA8120-M	DIODE	1		CN653	K1KA02BA0014	CONNECTOR (MALE)	1	
L1005	G1C100KA0055	COIL 10UH	1		D651	MA8056-MH	DIODE	1	
P1001	K1MN27B00036	CONNECTOR	1						
P1002	K1MN12BA0059	CONNECTOR	1						
P1003	K1MN26BA0059	CONNECTOR	1						
Q1005-12	2SD2216JOL	TRANSISTOR	8		■ E25	VEP001X9A	IRIS DIAL P. C. BOARD	1	(RTL)
Q1014, 15	B1ADCE000018	TRANSISTOR	2						
Q1016, 17	2SD2216JOL	TRANSISTOR	2		CN150	K1MN06BA0252	CONNECT	1	
R1003	DOYAR0000007	M. RESISTOR CH 1/16W 0	1		SW150	EVQPLPA08	SWITCH	1	
R1004	ERJ2GEJ102	M. RESISTOR CH 1/16W 1K	1		SW151	K9AA01500015	SWITCH	1	
R1005-11	ERJ2RKD270	M. RESISTOR CH 1/16W 27	7						
R1013	ERJ2RKD270	M. RESISTOR CH 1/16W 27	1						
R1018	ERJ2RHD472	M. RESISTOR CH 1/16W 4.7K	1						
R1020	ERJ2RHD223	M. RESISTOR CH 1/16W 22K	1						(RTL)
R1024	ERJ2GEJ104	M. RESISTOR CH 1/16W 100K	1						
R1069, 70	ERJ2RKD270	M. RESISTOR CH 1/16W 27	2						
TG1023	EYF6CU	TEST POINT	1						
■ E23	VEP001W0A	TOP CON P. C. BOARD	1	(RTL)					
C200	F3G1A476A029	T. CAPACITOR CH 10V 47U	1						
C201, 02	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2						
C203	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1						
C204, 05	F3F0J226A055	T. CAPACITOR CH6.3V 22U	2						
C206-09	ECJOEB1C153K	C. CAPACITOR CH 16V 0.015U	4						
C210-13	ECJ2FB0J106K	C. CAPACITOR CH 50V 10U	4						
C214, 15	ECJOEB1H222K	C. CAPACITOR CH 50V 2200P	2						
C216	ECJ1VB1C105K	C. CAPACITOR CH 16V 1U	1						
C217, 18	ECJOEB1A104K	C. CAPACITOR CH 10V 0.1U	2						
CN100	K1MN61BA0132	CONNECTOR	1						
CN101	K1MN10BA0059	CONNECTOR	1						
CN102	K1MN22BA0059	CONNECTOR	1						
CN103	K1KA02BA0047	CONNECTOR (MALE)	1						
CN104	K1MN24BA0059	CONNECTOR	1						
D101-08	D4ED1220A006	VARISTOR	8						
IC200	C0CBCBC00048	IC	1						
IC201	L2ES00000016	SENSOR U	1						
IC202	L2ES00000017	SENSOR U	1						
IC203	COABHA000078	IC	1						
L200	G1C100KA0115	COIL 10UH	1						
Q200	XP0450100L	TRANSISTOR	1						
R200, 01	ERJ2GEJ392	M. RESISTOR CH 1/16W 3.9K	2						